
PPCFGG0K09CLAD Datasheet



Product Name // 9 Contacts Straight Plug 0Y Series Push

Pull Connector

View Product Page

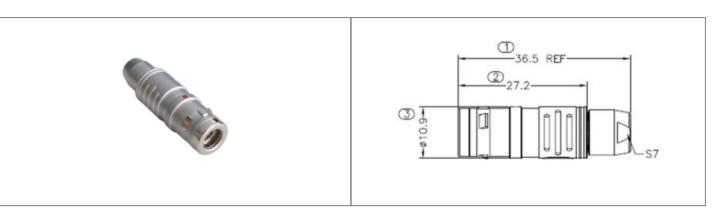

// Product Description:

- O 9 Contacts Straight Plug 0Y Series Push Pull Connector
- O Available in Fixed Socket version
- O ROHS compliance
- O IP66 rated
- O Temp:-50 C to +200 C

- O Solder Terminals
- O Durability >4500 cycles
- O Operating humidity up to 95%
- O Salt Spray Corrosion Test >144h
- O High packing density for space savings on panel mounts

// General Information:

Product Display Title: Product Family: Product Series: Is Vitalis: **Contact Pin Material: Current Max:** Diameter Over Coupling Ring Mm: Durability: Function: Insulator: Ip Rating: Locking Sleeve Material: Max Cable Entry Size: Min Cable Entry Size: Max Contact Accomodation Awg: Max Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature: Number Of Contacts: **Operating Humidity:** Pin Pin Terminal Voltage: Pin Shell Terminal Voltage: **Push Pull Connector Series: Rohs Compliant:** Salt Spray Corrosion Test: Shielding Efficiency Min: Shielding Efficiency Max: Shock Resistance: **Terminal Diameter:** Vibration Resistance Min: Vibration Resistance Max:

0Y Series Straight Plug Push Pull Connector **Circular Automation Connectors** Push Pull Connectors Y Series No Brass gold plated 3u" 2A 10.9mm >4500 cycles Straight Plug Push Pull Connector PPS IP66 Brass plated 5.0mm 4.5mm 28AWG 0.08mm2 +200°C -50°C 9 Contacts 0.95 600V 500V 0Y Series Yes 48h 95dB 80dB 100g 0.5mm 10Hz

// Product PDF Links

Push-Pull Connector Y Series...

// Product 3D CAD Model Links

PPCFGG0K09CLAD3D CAD Model

2000Hz