PPCFGG1B08CLAD Datasheet




Product Name // 8 Contacts Straight Plug 1X Series Push Pull Connector







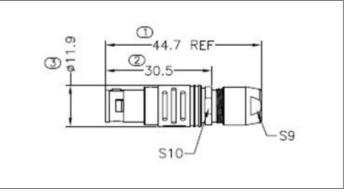

// Product Description:

- 8 Contacts Straight Plug 1X Series Push Pull Connector
- Available in Fixed Socket version
- O ROHS compliance
- O IP50 rated
- O Temp:-50 C to +200 C

- Solder Terminals
- O Durability >4500 cycles
- Operating humidity up to 95%
- Salt Spray Corrosion Test >144h
- O High packing density for space savings on panel mounts

// General Information:

Product Display Title:

Product Family:

Product Series: Contact Pin Material:

Current Max:

Diameter Over Coupling Ring Mm:

Durability:

Function:

Insulator: Ip Rating:

Locking Sleeve Material:

Max Cable Entry Size:

Min Cable Entry Size:

Max Contact Accomodation Mm2:

Max Contact Accomodation Awg:

Max Operating Temperature:

Min Operating Temperature: Number Of Contacts:

Operating Humidity:

Pin Pin Terminal Voltage: Pin Shell Terminal Voltage:

Push Pull Connector Series:

Rohs Compliant:

Salt Spray Corrosion Test:

Shielding Efficiency Min: Shielding Efficiency Max:

Shock Resistance:

Terminal Diameter:

Vibration Resistance Min: Vibration Resistance Max: 1X Series Straight Plug Push Pull Connector

Circular Automation Connectors

Push Pull Connectors X Series

Brass gold plated 3u"

5A

11.9mm

>4500 cycles

Straight Plug Push Pull Connector

PPS

IP50

Brass plated

6.0mm 5.3mm

22AWG

0.34mm2 +200°C

-50°C

8 Contacts

0.95 950V

1150V

1X Series Yes

48h

75dB

40dB

100g

0.7mm

10Hz 2000Hz



