PPCFGG1B10CLAD Datasheet




Product Name // 10 Contacts Straight Plug 1X Series Push Pull Connector

View Product Page





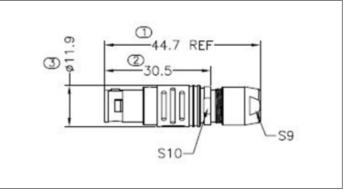

// Product Description:

- O 10 Contacts Straight Plug 1X Series Push Pull Connector
- Available in Fixed Socket version
- O ROHS compliance
- O IP50 rated
- O Temp:-50 C to +200 C

- Solder Terminals
- O Durability >4500 cycles
- Operating humidity up to 95%
- O Salt Spray Corrosion Test >144h
- O High packing density for space savings on panel mounts

// General Information:

Product Display Title:

Product Family: Product Series:

Contact Pin Material:

Current Max:

Diameter Over Coupling Ring Mm:

Durability:

Function:

Insulator: Ip Rating:

Locking Sleeve Material:

Max Cable Entry Size:

Min Cable Entry Size:

Max Contact Accomodation Awg: Max Contact Accomodation Mm2:

Max Operating Temperature:

Min Operating Temperature:

Number Of Contacts: Operating Humidity:

Pin Pin Terminal Voltage:

Pin Shell Terminal Voltage:

Push Pull Connector Series:

Rohs Compliant: Salt Spray Corros

Salt Spray Corrosion Test:

Shielding Efficiency Min: Shielding Efficiency Max:

Shock Resistance:

Terminal Diameter:

Vibration Resistance Min: Vibration Resistance Max:

1X Series Straight Plug Push Pull Connector

Circular Automation Connectors

Push Pull Connectors X Series

Brass gold plated 3u"

2.5A

11.9mm

>4500 cycles

Straight Plug Push Pull Connector

PPS

IP50

Brass plated 6.0mm

5.3mm

28AWG

0.08mm2 +200°C

-50°C

10 Contacts

0.95 900V

1500V 1X Series

Yes

48h

75dB

40dB

100g

0.5mm

10Hz 2000Hz

// Product PDF Links

Push-Pull Connector X Series...

// Product 3D CAD Model Links

PPCFGG1B10CLAD3D CAD Model