
PPCFGG1K10CLAD Datasheet



Product Name // 10 Contacts Straight Plug 1Y Series Push **Pull Connector**

View Product Page

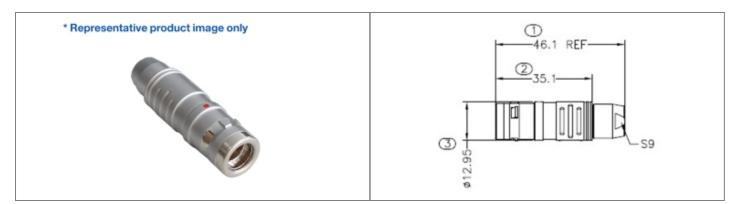

// Product Description:

- 0 10 Contacts Straight Plug 1Y Series Push Pull Connector
- 0 Available in Fixed Socket version
- 0 ROHS compliance
- 0 IP66 rated
- 0 Temp:-50 C to +200 C

- Solder Terminals
- 0 Durability >4500 cycles
- 0 Operating humidity up to 95%
- 0 Salt Spray Corrosion Test >144h
- 0 High packing density for space savings on panel mounts

// General Information:

Product Display Title:

Product Family:

Product Series:

Contact Pin Material:

Current Max:

Diameter Over Coupling Ring Mm:

Durability: Function:

Insulator:

Ip Rating: Locking Sleeve Material:

Max Cable Entry Size:

Min Cable Entry Size:

Max Contact Accomodation Awg:

Max Contact Accomodation Mm2:

Max Operating Temperature: Min Operating Temperature:

Number Of Contacts:

Operating Humidity:

Pin Pin Terminal Voltage:

Pin Shell Terminal Voltage: **Push Pull Connector Series:**

Rohs Compliant:

Salt Spray Corrosion Test:

Shielding Efficiency Min: Shielding Efficiency Max:

Shock Resistance:

Terminal Diameter:

Vibration Resistance Min:

Vibration Resistance Max:

1Y Series Straight Plug Push Pull Connector

Circular Automation Connectors

Push Pull Connectors Y Series

Brass gold plated 3u"

2.5A

10.9mm

>4500 cycles

Straight Plug Push Pull Connector

PPS

IP66

Brass plated

6.0mm 5.6mm

28AWG

0.08mm2 +200°C

-50°C

10 Contacts

0.95 900V

1500V

1Y Series

Yes

48h 95dB

80dB 100g

0.5mm

10Hz

2000Hz

// Product PDF Links

Push-Pull Connector Y Series...

// Product 3D CAD Model Links

PPCFGG1K10CLAD3D CAD Model