PPCFGG2B08CLAD Datasheet




Product Name // 8 Contacts Straight Plug 2X Series Push **Pull Connector**

View Product Page





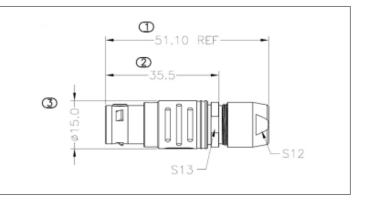

// Product Description:

- 0 8 Contacts Straight Plug 2X Series Push Pull Connector
- 0 Available in Fixed Socket version
- 0 ROHS compliance
- 0 IP50 rated
- 0 Temp:-50 C to +200 C

- Solder Terminals
- 0 Durability >4500 cycles
- 0 Operating humidity up to 95%
- 0 Salt Spray Corrosion Test >144h
- 0 High packing density for space savings on panel mounts

// General Information:

Product Display Title:

Product Family:

Product Series:

Contact Pin Material:

Current Max:

Diameter Over Coupling Ring Mm:

Durability:

Function:

Insulator: Ip Rating:

Locking Sleeve Material:

Max Cable Entry Size:

Min Cable Entry Size:

Max Contact Accomodation Awg: Max Contact Accomodation Mm2:

Max Operating Temperature:

Min Operating Temperature:

Number Of Contacts:

Operating Humidity: Pin Pin Terminal Voltage:

Pin Shell Terminal Voltage:

Push Pull Connector Series:

Rohs Compliant:

Salt Spray Corrosion Test: Shielding Efficiency Min:

Shielding Efficiency Max:

Shock Resistance: **Terminal Diameter:**

Vibration Resistance Min:

Vibration Resistance Max:

2X Series Straight Plug Push Pull Connector Circular Automation Connectors

Push Pull Connectors X Series

Brass gold plated 3u"

10A

15mm

>4500 cycles

Straight Plug Push Pull Connector

PPS

IP50

Brass plated

6.0mm 5.3mm

22AWG

0.34mm2 +200°C

-50°C

8 Contacts

0.95 1500V

1250V

2X Series

Yes

48h 75dB

40dB

100g

0.9mm

10Hz

2000Hz

// Product PDF Links

Push-Pull Connector X Series...

// Product 3D CAD Model Links

PPCFGG2B08CLAD3D CAD Model