
## PPCFGG2B12CLAD Datasheet



## Product Name // 12 Contacts Straight Plug 2X Series Push **Pull Connector**

View Product Page



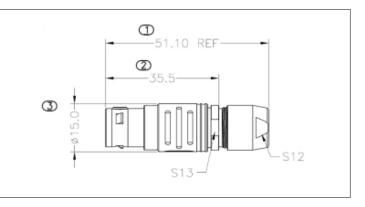

## // Product Description:

- 0 12 Contacts Straight Plug 2X Series Push Pull Connector
- 0 Available in Fixed Socket version
- 0 ROHS compliance
- 0 IP50 rated
- 0 Temp:-50 C to +200 C

- Solder Terminals
- 0 Durability >4500 cycles
- 0 Operating humidity up to 95%
- 0 Salt Spray Corrosion Test >144h
- 0 High packing density for space savings on panel mounts

## // General Information:

**Product Display Title:** 

**Product Family:** 

Product Series: Contact Pin Material:

**Current Max:** 

Diameter Over Coupling Ring Mm:

**Durability:** 

Function:

Insulator: Ip Rating:

Locking Sleeve Material:

Max Cable Entry Size:

Min Cable Entry Size: Max Contact Accomodation Awg:

Max Contact Accomodation Mm2:

Max Operating Temperature:

Min Operating Temperature: **Number Of Contacts:** 

Operating Humidity:

Pin Pin Terminal Voltage: Pin Shell Terminal Voltage:

**Push Pull Connector Series:** 

**Rohs Compliant:** 

Salt Spray Corrosion Test:

Shielding Efficiency Min: Shielding Efficiency Max:

Shock Resistance:

**Terminal Diameter:** Vibration Resistance Min:

Vibration Resistance Max:

2X Series Straight Plug Push Pull Connector

Circular Automation Connectors

Push Pull Connectors X Series

Brass gold plated 3u"

15mm

>4500 cycles

Straight Plug Push Pull Connector

**PPS** 

IP50

Brass plated

6.0mm

5.3mm 22AWG

0.34mm2 +200°C

-50°C

12 Contacts

0.95 1250V

1350V

2X Series

Yes 48h

75dB

40dB

100g

0.7mm

10Hz

2000Hz

// Product PDF Links



// Product 3D CAD Model Links



PPCFGG2B12CLAD3D CAD Model