
PPCFGG2B19CLAD Datasheet



Product Name // 19 Contacts Straight Plug 2X Series Push **Pull Connector**





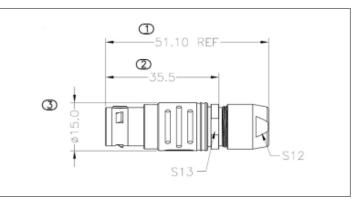

// Product Description:

- 0 19 Contacts Straight Plug 2X Series Push Pull Connector
- 0 Available in Fixed Socket version
- 0 ROHS compliance
- 0 IP50 rated
- 0 Temp:-50 C to +200 C

- Solder Terminals
- 0 Durability >4500 cycles
- 0 Operating humidity up to 95%
- 0 Salt Spray Corrosion Test >144h
- 0 High packing density for space savings on panel mounts

// General Information:

Product Display Title:

Product Family: Product Series:

Contact Pin Material:

Current Max:

Diameter Over Coupling Ring Mm:

Durability:

Function:

Insulator: Ip Rating:

Locking Sleeve Material:

Max Cable Entry Size:

Min Cable Entry Size:

Max Contact Accomodation Awg: Max Contact Accomodation Mm2:

Max Operating Temperature:

Min Operating Temperature: **Number Of Contacts:**

Operating Humidity:

Pin Pin Terminal Voltage:

Pin Shell Terminal Voltage: **Push Pull Connector Series:**

Rohs Compliant:

Salt Spray Corrosion Test:

Shielding Efficiency Min:

Shielding Efficiency Max: Shock Resistance:

Terminal Diameter:

Vibration Resistance Min:

Vibration Resistance Max:

2X Series Straight Plug Push Pull Connector Circular Automation Connectors

Push Pull Connectors X Series

Brass gold plated 3u"

15mm

>4500 cycles

Straight Plug Push Pull Connector **PPS**

IP50

Brass plated

8.0mm

7.3mm

22AWG

0.34mm2 +200°C

-50°C

19 Contacts

0.95 950V

1250V

2X Series

Yes

48h 75dB

40dB

100g

0.7mm

10Hz 2000Hz

// Product PDF Links

Push-Pull Connector X Series...

// Product 3D CAD Model Links

PPCFGG2B19CLAD3D CAD Model