## PPCFGG2K07CLAD Datasheet




## Product Name // 7 Contacts Straight Plug 2Y Series Push **Pull Connector**







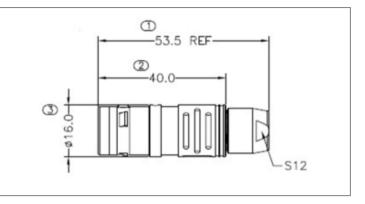

## // Product Description:

- 0 7 Contacts Straight Plug 2Y Series Push Pull Connector
- 0 Available in Fixed Socket version
- 0 ROHS compliance
- 0 IP66 rated
- 0 Temp:-50 C to +200 C

- Solder Terminals
- 0 Durability >4500 cycles
- 0 Operating humidity up to 95%
- 0 Salt Spray Corrosion Test >144h
- High packing density for space savings on panel mounts 0

## // General Information:

**Product Display Title:** 

**Product Family:** 

**Product Series:** 

Is Vitalis:

Contact Pin Material:

**Current Max:** 

Diameter Over Coupling Ring Mm:

Durability: Function:

Insulator:

Ip Rating:

Locking Sleeve Material: Max Cable Entry Size:

Min Cable Entry Size: Max Contact Accomodation Awg:

Max Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature: **Number Of Contacts: Operating Humidity:** 

Pin Pin Terminal Voltage: Pin Shell Terminal Voltage: **Push Pull Connector Series:** 

**Rohs Compliant:** 

Salt Spray Corrosion Test: Shielding Efficiency Min: Shielding Efficiency Max: Shock Resistance: **Terminal Diameter:** 

Vibration Resistance Min:

Vibration Resistance Max:

2Y Series Straight Plug Push Pull Connector

Circular Automation Connectors Push Pull Connectors Y Series

Brass gold plated 3u"

11A

>4500 cycles

Straight Plug Push Pull Connector

**PPS** IP66

Brass plated 5.0mm

4.6mm 20AWG

0.50mm2 +200°C

-50°C

7 Contacts 0.95

1750V

1600V 2Y Series

Yes

48h 95dB

80dB

100g

1.3mm 10Hz

2000Hz

// Product PDF Links

Push-Pull Connector Y Series...

// Product 3D CAD Model Links

PPCFGG2K07CLAD3D CAD Model