
PPCFGG2K18CLAD Datasheet



Product Name // 18 Contacts Straight Plug 2Y Series Push **Pull Connector**

View Product Page



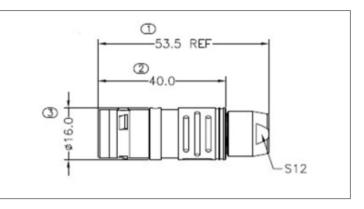

// Product Description:

- 0 18 Contacts Straight Plug 2Y Series Push Pull Connector
- 0 Available in Fixed Socket version
- 0 ROHS compliance
- 0 IP66 rated
- 0 Temp:-50 C to +200 C

- Solder Terminals
- 0 Durability >4500 cycles
- 0 Operating humidity up to 95%
- 0 Salt Spray Corrosion Test >144h
- High packing density for space savings on panel mounts 0

// General Information:

Product Display Title:

Product Family:

Product Series:

Is Vitalis:

Contact Pin Material:

Current Max:

Diameter Over Coupling Ring Mm:

Durability: Function:

Insulator: Ip Rating:

Locking Sleeve Material: Max Cable Entry Size:

Min Cable Entry Size: Max Contact Accomodation Awg: Max Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature:

Number Of Contacts: Operating Humidity: Pin Pin Terminal Voltage: Pin Shell Terminal Voltage: **Push Pull Connector Series:**

Rohs Compliant: Salt Spray Corrosion Test: Shielding Efficiency Min: Shielding Efficiency Max: **Shock Resistance: Terminal Diameter:** Vibration Resistance Min:

Vibration Resistance Max:

2Y Series Straight Plug Push Pull Connector

Circular Automation Connectors Push Pull Connectors Y Series

Brass gold plated 3u"

5.5A

>4500 cycles

Straight Plug Push Pull Connector PPS

IP66 Brass plated 8.0mm 7.6mm 22AWG 0.34mm2 +200°C -50°C

18 Contacts 0.95 950V 1200V 2Y Series Yes 48h

95dB 80dB 100g 0.7mm 10Hz 2000Hz

// Product PDF Links

Push-Pull Connector Y Series...

// Product 3D CAD Model Links

PPCFGG2K18CLAD3D CAD Model