
PPCFGG3B03CLAD Datasheet



Product Name // 3 Contacts Straight Plug 3X Series Push

🚯 View Product Page



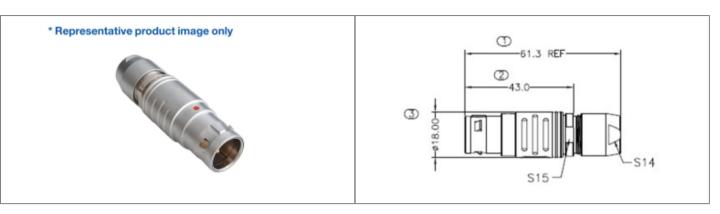

// Product Description:

- O 3 Contacts Straight Plug 3X Series Push Pull Connector
- O Available in Fixed Socket version
- O ROHS compliance
- O IP50 rated
- O Temp:-50 C to +200 C

- O Solder Terminals
- O Durability >4500 cycles
- O Operating humidity up to 95%
- O Salt Spray Corrosion Test >144h
- O High packing density for space savings on panel mounts

// General Information:

Product Display Title: Product Family: Product Series: Is Vitalis: **Contact Pin Material: Current Max:** Diameter Over Coupling Ring Mm: Durability: Function: Insulator: Ip Rating: Locking Sleeve Material: Max Cable Entry Size: Min Cable Entry Size: Max Contact Accomodation Awg: Max Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature: Number Of Contacts: **Operating Humidity:** Pin Pin Terminal Voltage: Pin Shell Terminal Voltage: **Push Pull Connector Series: Rohs Compliant:** Salt Spray Corrosion Test: Shielding Efficiency Min: Shielding Efficiency Max: Shock Resistance: **Terminal Diameter:** Vibration Resistance Min: Vibration Resistance Max:

3X Series Straight Plug Push Pull Connector **Circular Automation Connectors** Push Pull Connectors X Series No Brass gold plated 3u" 25A 18mm >4500 cycles Straight Plug Push Pull Connector PPS IP50 Brass plated 7.0mm 6.3mm 14AWG 2.5mm2 +200°C -50°C 3 Contacts 0.95 1900V 1500V **3X Series** Yes 48h 75dB 40dB 100g 2mm 10Hz

// Product PDF Links

Push-Pull Connector X Series...

// Product 3D CAD Model Links

PPCFGG3B03CLAD3D CAD Model

2000Hz