PPCFGG3B08CLAD Datasheet




Product Name // 8 Contacts Straight Plug 3X Series Push **Pull Connector**

View Product Page

* Representative product image only



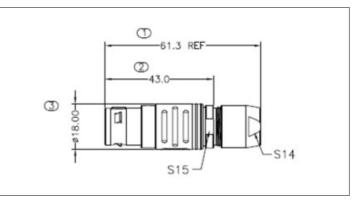

// Product Description:

- 0 8 Contacts Straight Plug 3X Series Push Pull Connector
- 0 Available in Fixed Socket version
- 0 ROHS compliance
- 0 IP50 rated
- 0 Temp:-50 C to +200 C

- Solder Terminals
- 0 Durability >4500 cycles
- 0 Operating humidity up to 95%
- 0 Salt Spray Corrosion Test >144h
- 0 High packing density for space savings on panel mounts

// General Information:

Product Display Title:

Product Family: Product Series:

Contact Pin Material:

Current Max:

Diameter Over Coupling Ring Mm:

Durability:

Function:

Insulator: Ip Rating:

Locking Sleeve Material:

Max Cable Entry Size:

Min Cable Entry Size: Max Contact Accomodation Awg:

Max Contact Accomodation Mm2:

Max Operating Temperature:

Min Operating Temperature:

Number Of Contacts: Operating Humidity:

Pin Pin Terminal Voltage:

Pin Shell Terminal Voltage:

Push Pull Connector Series:

Rohs Compliant:

Salt Spray Corrosion Test:

Shielding Efficiency Min: Shielding Efficiency Max:

Shock Resistance:

Terminal Diameter: Vibration Resistance Min:

Vibration Resistance Max:

3X Series Straight Plug Push Pull Connector

Circular Automation Connectors

Push Pull Connectors X Series

Brass gold plated 3u"

18mm

>4500 cycles

Straight Plug Push Pull Connector **PPS**

IP50

Brass plated

7.0mm

6.3mm

20AWG 0.50mm2

+200°C

-50°C

8 Contacts

0.95 1650V

1150V

3X Series

Yes

48h 75dB

40dB

100g 1.3mm

10Hz

2000Hz

// Product PDF Links

Push-Pull Connector X Series...

// Product 3D CAD Model Links

PPCFGG3B08CLAD3D CAD Model