PPCFGG3B09CLAD Datasheet




Product Name // 9 Contacts Straight Plug 3X Series Push Pull Connector

View Product Page





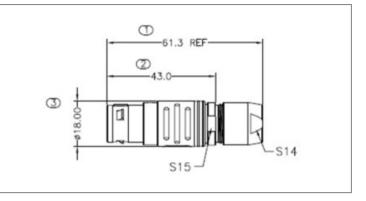

// Product Description:

- O 9 Contacts Straight Plug 3X Series Push Pull Connector
- O Available in Fixed Socket version
- O ROHS compliance
- O IP50 rated
- O Temp:-50 C to +200 C

- Solder Terminals
- O Durability >4500 cycles
- Operating humidity up to 95%
- O Salt Spray Corrosion Test >144h
- O High packing density for space savings on panel mounts

// General Information:

Product Display Title: 3X Series Straight Plug Push Pull Connector

Product Family:Circular Automation ConnectorsProduct Series:Push Pull Connectors X Series

Is Vitalis:

Contact Pin Material:Brass gold plated 3u"Current Max:6,15A

Current Max: 6,15A

Diameter Over Coupling Ring Mm: 18mm

Durability:>4500 cyclesFunction:Straight Plug Push Pull Connector

Insulator:PPSIp Rating:IP50Locking Sleeve Material:Brass plated

Max Cable Entry Size:7.0mmMin Cable Entry Size:6.3mmMax Contact Accomodation Awg:20AWGMax Contact Accomodation Mm2:0.50mm2Max Operating Temperature:+200°CMin Operating Temperature:-50°C

Number Of Contacts:9 ContactsOperating Humidity:0.95Pin Pin Terminal Voltage:1350VPin Shell Terminal Voltage:1050VPush Pull Connector Series:3X SeriesRohs Compliant:Yes

Salt Spray Corrosion Test:

48h
Shielding Efficiency Min:

55dB
Shielding Efficiency Max:

40dB
Shock Resistance:

100g
Terminal Diameter:

1.3mm
Vibration Resistance Min:

10Hz
Vibration Resistance Max:

// Product 3D CAD Model Links

PPCFGG3B09CLAD3D CAD Model

// Product PDF Links

Push-Pull Connector X Series...

