PPCFGG3B22CLAD Datasheet




Product Name // 22 Contacts Straight Plug 3X Series Push **Pull Connector**







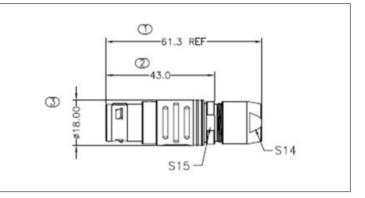

// Product Description:

- 0 22 Contacts Straight Plug 3X Series Push Pull Connector
- 0 Available in Fixed Socket version
- 0 ROHS compliance
- 0 IP50 rated
- 0 Temp:-50 C to +200 C

- Solder Terminals
- 0 Durability >4500 cycles
- 0 Operating humidity up to 95%
- 0 Salt Spray Corrosion Test >144h
- High packing density for space savings on panel mounts 0

// General Information:

Product Display Title:

Product Family:

Product Series:

Is Vitalis:

Contact Pin Material:

Current Max:

Diameter Over Coupling Ring Mm:

Durability: Function:

Insulator: Ip Rating:

Locking Sleeve Material: Max Cable Entry Size:

Min Cable Entry Size: Max Contact Accomodation Awg: Max Contact Accomodation Mm2: Max Operating Temperature: Min Operating Temperature:

Number Of Contacts: Operating Humidity: Pin Pin Terminal Voltage: Pin Shell Terminal Voltage: **Push Pull Connector Series:**

Rohs Compliant:

Salt Spray Corrosion Test: Shielding Efficiency Min: Shielding Efficiency Max: Shock Resistance: **Terminal Diameter:** Vibration Resistance Min:

Vibration Resistance Max:

3X Series Straight Plug Push Pull Connector

Circular Automation Connectors Push Pull Connectors X Series

Brass gold plated 3u"

5.5A

>4500 cycles

Straight Plug Push Pull Connector **PPS**

IP50 Brass plated 11.0mm

10.3mm 22AWG 0.34mm2 +200°C -50°C 22 Contacts 0.95 1000V 900V 3X Series

Yes 48h 75dB 40dB 100g 0.7mm 10Hz 2000Hz

// Product PDF Links



// Product 3D CAD Model Links



PPCFGG3B22CLAD3D CAD Model