
## PPCFGG3K09CLAD Datasheet



### Product Name // 9 Contacts Straight Plug 3Y Series Push **Pull Connector**



# \* Representative product image only

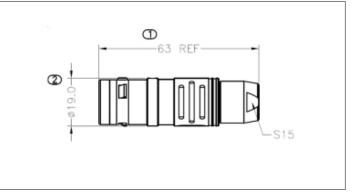

### // Product Description:

- 0 9 Contacts Straight Plug 3Y Series Push Pull Connector
- 0 Available in Fixed Socket version
- 0 ROHS compliance
- 0 IP66 rated
- 0 Temp:-50 C to +200 C

- Solder Terminals
- 0 Durability >4500 cycles
- 0 Operating humidity up to 95%
- 0 Salt Spray Corrosion Test >144h
- 0 High packing density for space savings on panel mounts

### // General Information:

**Product Display Title:** 

**Product Family:** 

Product Series: Contact Pin Material:

**Current Max:** 

Diameter Over Coupling Ring Mm:

**Durability:** 

Function: Insulator:

Ip Rating:

Locking Sleeve Material:

Max Cable Entry Size:

Min Cable Entry Size:

Max Contact Accomodation Awg: Max Contact Accomodation Mm2:

Max Operating Temperature:

Min Operating Temperature:

**Number Of Contacts:** Operating Humidity:

Pin Pin Terminal Voltage:

Pin Shell Terminal Voltage:

**Push Pull Connector Series:** 

**Rohs Compliant:** 

Salt Spray Corrosion Test:

Shielding Efficiency Min: Shielding Efficiency Max:

Shock Resistance:

**Terminal Diameter:** 

Vibration Resistance Min:

Vibration Resistance Max:

3Y Series Straight Plug Push Pull Connector

Circular Automation Connectors

Push Pull Connectors Y Series

Brass gold plated 3u"

6,15A

19mm

>4500 cycles

Straight Plug Push Pull Connector

**PPS** 

IP66

Brass plated

7.0mm 6.6mm

20AWG

0.50mm2 +200°C

-50°C

9 Contacts

0.95

1350V

1050V

3Y Series Yes

48h

95dB

80dB

100g

1.3mm

10Hz 2000Hz

// Product PDF Links

Push-Pull Connector Y Series...

// Product 3D CAD Model Links

PPCFGG3K09CLAD3D CAD Model