
PX0100S12AGY Datasheet



Product Name // 12 Contacts Male Standard Rectangular **Grey Connector**



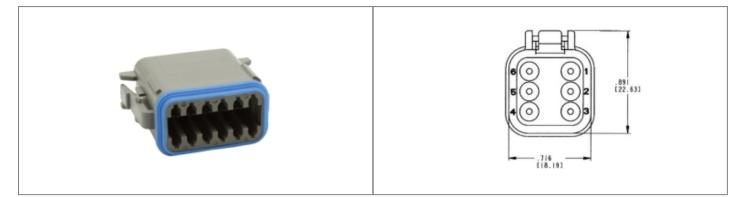

// Product Description:

- 0 12 Contacts Male Standard Rectangular Grey Connector
- 0 Enhanced Seal Protection (ESR), Protective End Cap (PEC), Terminating Resistor (TER), Shrink Boot Adapter (SBA), Welded Flange (WFL) and Y-Type Connector (YTY) Available
- 0 Water and dustproof to IP68 when mated with compatible
- Mate with PX0101 Series, as appropriate

- Wedgelocks provided
- 0 Crimp Terminals
- 0 Mechanical Cycles = 100 (min)
- 0 Operating Temperature = -25°C to +120°C

// General Information:

Product Display Title:

Product Family: Product Series:

Body Colour:

Body Material:

Body Material Type:

Contact Type:

Coupling Type: **Current Max:**

Ip Rating:

Min Operating Temperature:

Voltage Max:

Max Operating Temperature: **Number Of Contacts:**

12 Contacts Male Standard Rectangular Grey Connector

Rectangular Connectors

Standard Rectangular Connectors

Polycarbonate/Polybutylene Terephthalate (PC/PBT)

Plastic Body

Socket Contact

Snap-in 13A

IP68

+120°C

-40°C 12 Contacts

250V

// Product PDF Links

Rectangular Connector Datasheet

// Product 3D CAD Model Links

PX0100S12AGY3D CAD Model