


PX0101P04GY Datasheet

Product Name // 4 Contacts Female Standard Rectangular Grey Connector

 [View Product Page](#)

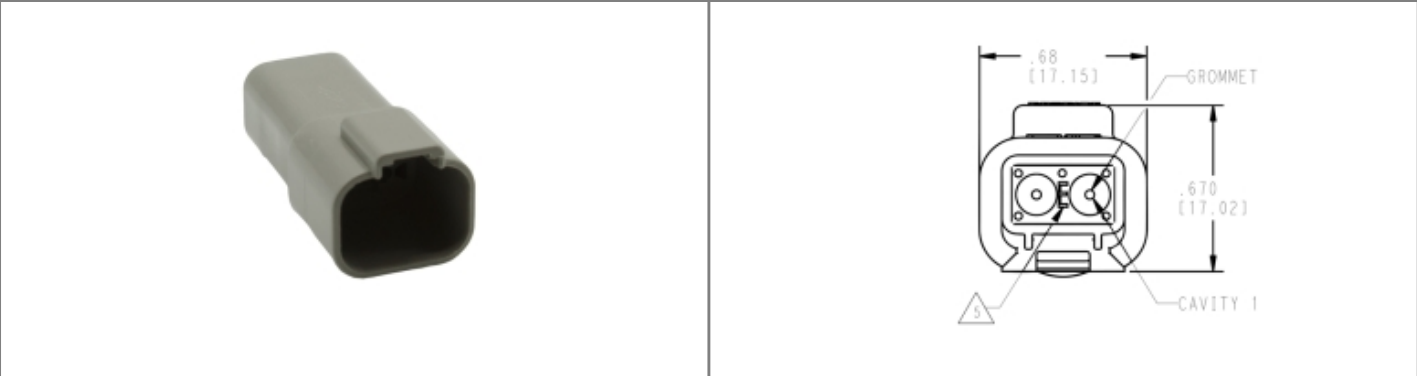

// Product Description:



4 Contacts Female Standard Rectangular Grey Connector



Enhanced Seal Protection (ESR), Protective End Cap (PEC), Terminating Resistor (TER), Shrink Boot Adapter (SBA), Welded Flange (WFL) and Y-Type Connector (YTY) Available



Water and dustproof to IP68 when mated with compatible connector



Mate with PX0 100 Series, as appropriate



Wedgelocks provided



Crimp Terminals



Mechanical Cycles = 100 (min)



Operating Temperature = -25°C to +120°C

// General Information:

Product Display Title:

Product Family:

Product Series:

Body Colour:

Body Material:

Body Material Type:

Contact Type:

Coupling Type:

Current Max:

Ip Rating:

Max Operating Temperature:

Min Operating Temperature:

Number Of Contacts:

Voltage Max:

4 Contacts Female Standard Rectangular Grey Connector

Rectangular Connectors

Standard Rectangular Connectors

Grey

Polycarbonate/Polybutylene Terephthalate (PC/PBT)

Plastic Body

Plug Contact

Snap-in

13A

IP68

+120°C

-40°C

4 Contacts

250V

// Product PDF Links



[Rectangular Connector Datasheet](#)

// Product 3D CAD Model Links



[PX0101P04GY3D CAD Model](#)