
PX0400/001/10P Datasheet



Product Name // Overmould Flex Cable Connector PX0400 Series Pre-Wired 1M Cable 10 Contact Plug



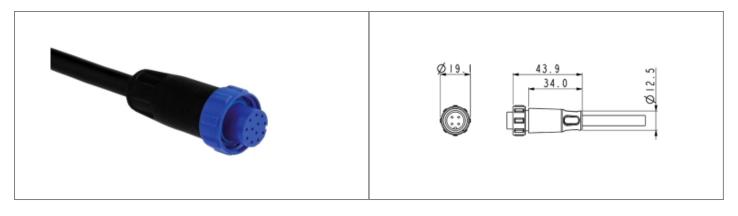

// Product Description:

- O Overmoulded Flex Connector pre-wired cable assemblies
- Water and dustproof to IP68 when mated with compatible connector
- O Pin or Socket
- Q 2, 3, 4, 6, 8, 10 or 12 Contact

- O Cable acceptance 2.5mm-9mm
- O Choice of cable length depending on part code
- PX0481 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PX0401, PX0411 Inline Connectors and PX0412, PX0413 Panel Mount Connectors

// General Information:

Product Display Title: Product Family:

Product Series:

Approvals:

Body Material:

Cable Length:

Contact Type: Coupling Type:

Current Max:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function:

Ip Rating:

Max Operating Temperature:

Min Operating Temperature: Number Of Contacts:

Number of Contacts:

Voltage Max:

Overmoulded Flex Connector pre-wired cable assemblies

Circular Power Connectors

400 Series Buccaneer

CSA, UL, VDE

Polyurethane (PU)

1m

Plug Contact

Screw 1A

19.1mm

UL94V-HB

Flex Connector Single Ended Cable

IP68, IP69K

+85°C

-20°C

10 Contacts

50V

// Product PDF Links



400 Series power connectors...

// Product 3D CAD Model Links



PX0400/001/10P3D CAD Model