
# PX0400/005/3S Datasheet



## Product Name // Overmould Flex Cable Connector PX0400 Series Pre-Wired 5M Cable 3 Contact Socket



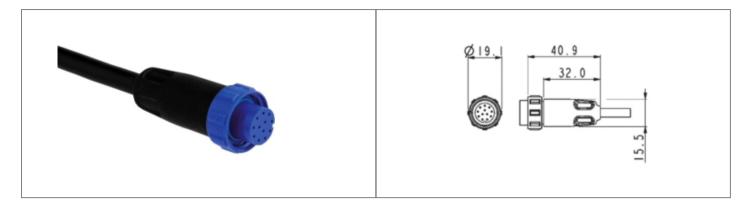

#### // Product Description:

- Overmoulded Flex Connector pre-wired cable assemblies
- Water and dustproof to IP68 when mated with compatible connector
- O Pin or Socket
- O 2, 3, 4, 6, 8, 10 or 12 Contact

- O Cable acceptance 2.5mm-9mm
- O Choice of cable length depending on part code
- PX0481 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PX0401, PX0411 Inline Connectors and PX0412, PX0413 Panel Mount Connectors

#### // General Information:

Product Display Title:
Product Family:
Product Series:
Approvals:
Body Material:
Contact Type:
Coupling Type:
Current Max:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function: Ip Rating:

Max Operating Temperature: Min Operating Temperature: Number Of Contacts: Voltage Max: Overmoulded Flex Connector pre-wired cable assemblies

Circular Power Connectors 400 Series Buccaneer CSA, UL, VDE Polyurethane (PU) Socket Contact Screw

8A 19.1mm UL94V-HB

Flex Connector Single Ended Cable IP68, IP69K

+85°C -20°C 3 Contacts 250V

### // Product PDF Links



// Product 3D CAD Model Links

