


# PX0402/015/4S Datasheet

**Product Name // Right-Angle Overmould Flex Cable**  
**Connector PX0402 Series Pre-Wired 15M Cable 4 Contact**  
**Socket**

 [View Product Page](#)

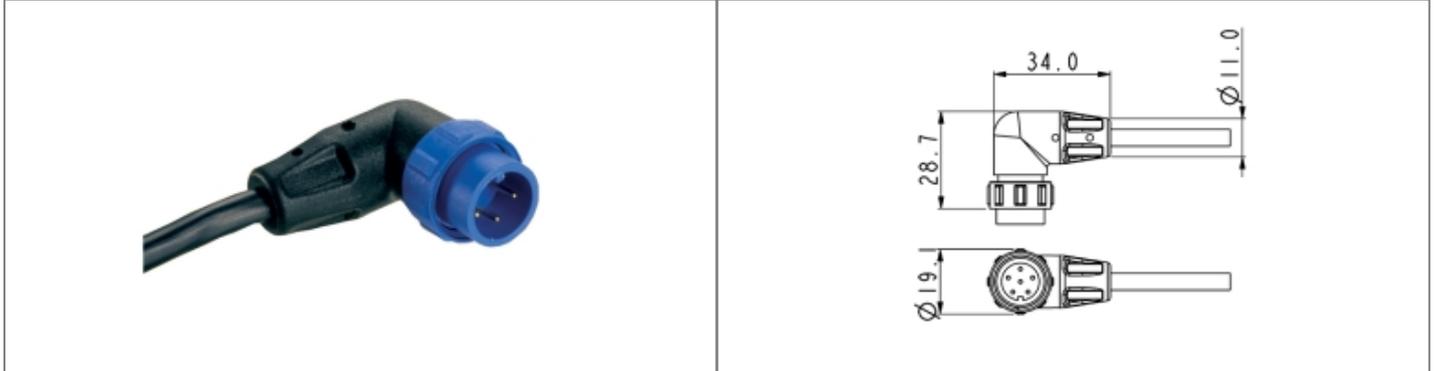

## // Product Description:

-  Right-Angled Overmoulded Flex Connector pre-wired cable assemblies
-  Water and dustproof to IP68 when mated with compatible connector
-  Pin or Socket
-  2, 3, 4, 6, 8, 10 or 12 Contact
-  Cable acceptance 2.5mm-9mm
-  Choice of cable length depending on part code
-  PX0481 Sealing Cap available separately to maintain IP rating of unmated connectors
-  Mates with PX0401, PX0411 Inline Connectors and PX0412, PX0413 Panel Mount Connectors

## // General Information:

Product Display Title:	Right-Angled Overmoulded Flex Connector pre-wired cable assemblies
Product Family:	Circular Power Connectors
Product Series:	400 Series Buccaneer
Approvals:	CSA, UL, VDE
Body Material:	Polyurethane (PU)
Cable Length:	15m
Contact Type:	Socket Contact
Coupling Type:	Screw
Current Max:	5A
Diameter Over Coupling Ring Mm:	19.1mm
Flamability Rating:	UL94V-HB
Function:	Right Angle Flex Connector Single Ended Cable
Ip Rating:	IP68, IP69K
Max Operating Temperature:	+85°C
Min Operating Temperature:	-20°C
Number Of Contacts:	4 Contacts
Voltage Max:	125V

### // Product PDF Links

 [400 Series power connectors...](#)

### // Product 3D CAD Model Links

 [PX0402/015/4S3D CAD Model](#)