
PX0410/10S/5055 Datasheet



Product Name // Flex Cable Connector PX0410 Series 10 Contact Socket 5.0mm-5.5mm Cable

View Product Page

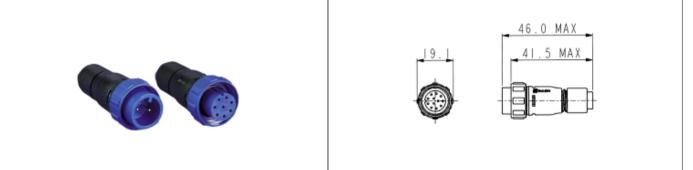

// Product Description:

- O Flex Cable Connector
- Water and dustproof to IP68 when mated with compatible connector
- O Pin or Socket
- 2, 3, 4, 6, 8, 10 or 12 Contact
- O Crimp or Solder Contacts available (supplied separately; use 8A for 2/3 Contact, 5A for 4/6/8 Contact, 1A for 10/12 Contact)
- O Contact insertion and crimp tools available (supplied separately)
- O Choice of cable acceptance 3mm-7mm depending on part code; supplied with Cable Gland and Collet colour coded by size
- PX0481 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with Inline or Panel Mount Connectors PX0401, PX0411, PX0412, PX0413

// General Information:

Product Display Title:
Product Family:
Product Series:
Approvals:
Body Material:
Body Material Type:

Contact Type: Coupling Type: Current Max:

Diameter Over Coupling Ring Mm:

Flamability Rating: Function:

Ip Rating:

Voltage Max:

Max Cable Entry Size: Min Cable Entry Size:

Max Contact Accomodation Awg:
Min Contact Accomodation Awg:
Max Contact Accomodation Mm2:
Min Contact Accomodation Mm2:
Max Operating Temperature:
Min Operating Temperature:
Number Of Contacts:

Flex Cable Connector Circular Power Connectors 400 Series Buccaneer

UL

Polyamide (PA) Plastic Body Socket Contact Screw

1A 19.1mm UL94V-0

Flex Cable Connector

1P68 5.5mm 5.0mm 28AWG 24AWG 0.25mm2 0.08mm2 +80°C -40°C 10 Contacts 50V

// Product PDF Links

400 Series power connectors...

400 Series power connectors wiring...

// Product 3D CAD Model Links

PX0410/10S/50553D CAD Model