
## PX0416/1M00 Datasheet



## Product Name // Pre-Wired Flex SMB Connector 1M cable PX0416 Series



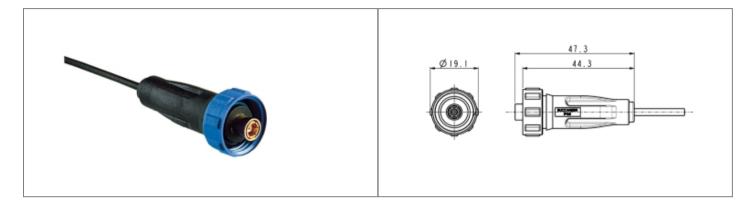

## // Product Description:

- O Pre-Wired Flex SMB Connectors
- Water and dustproof to IP68 when mated with compatible connector
- Frequency range 0-4GHz

- Overmoulded connector supplied with 50 Ohm impedance SMB plug terminated with RG-174 cable in a choice of lengths depending on part code
- PX0485 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PX0414 Panel Connector

## // General Information:

Product Display Title:
Product Family:
Product Series:
Change Notes:
Approvals:

Body Material: Cable Length: Contact Type: Coupling Type:

Diameter Over Coupling Ring Mm:

Flamability Rating: Function: Ip Rating:

Max Operating Temperature: Min Operating Temperature: Number Of Contacts: Pre-Wired Flex SMB Connectors Circular Data Connectors 400 Series - SMB Buccaneer PRODUCT-MOQ-ADJUSTMENT

CSA, UL, VDE PVC 1m Plug Contact Screw 19.1mm UL94V-0

Flex Connector Single Ended Cable

IP68, IP69K +80°C -40°C 1 Contact

// Product PDF Links

400 Series SMB connectors product.

// Product 3D CAD Model Links

PX0416/1M003D CAD Model