
PX0416/1M00 Datasheet



🚯 View Product Page

<u>bulg</u>in

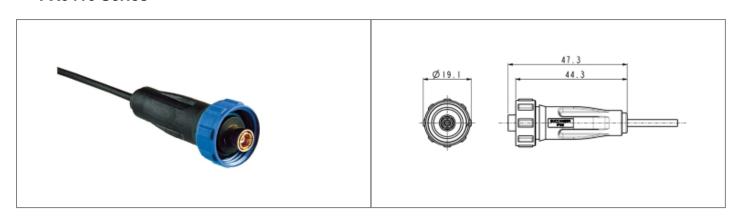

// Product Description:

- O Pre-Wired Flex SMB Connectors
- O Water and dustproof to IP68 when mated with compatible connector
- O Frequency range 0-4GHz

- Overmoulded connector supplied with 50 Ohm impedance SMB plug terminated with RG-174 cable in a choice of lengths depending on part code
- O PX0485 Sealing Cap available separately to maintain IP rating of unmated connectors
- O Mate with PX0414 Panel Connector

// General Information:

Product Display Title: Product Family: Product Series: Change Notes: Is Vitalis: Approvals: Body Material: Cable Length: Contact Type: Coupling Type: Diameter Over Coupling Ring Mm: Flamability Rating: Function: Ip Rating: Max Operating Temperature: Min Operating Temperature: Number Of Contacts:

Pre-Wired Flex SMB Connectors **Circular Data Connectors** 400 Series - SMB Buccaneer PRODUCT-MOQ-ADJUSTMENT No CSA, UL, VDE PVC 1m Plug Contact Screw 19.1mm UL94V-0 Flex Connector Single Ended Cable IP68, IP69K +80°C -40°C 1 Contact

// Product PDF Links

400 Series SMB connectors product...

// Product 3D CAD Model Links