
PX0416/3M00 Datasheet



Product Name // Pre-Wired Flex SMB Connector 3M cable **PX0416 Series**



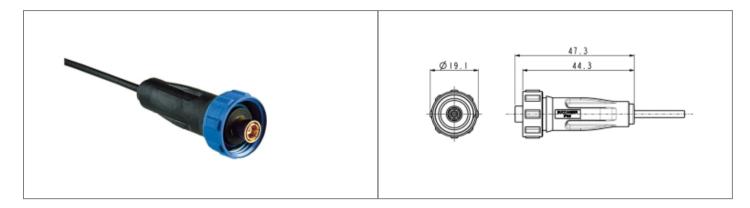

// Product Description:

- Pre-Wired Flex SMB Connectors
- 0 Water and dustproof to IP68 when mated with compatible connector
- 0 Frequency range 0-4GHz

- Overmoulded connector supplied with 50 Ohm impedance SMB plug terminated with RG-174 cable in a choice of lengths depending on part code
- 0 PX0485 Sealing Cap available separately to maintain IP rating of unmated connectors
- 0 Mate with PX0414 Panel Connector

// General Information:

Product Display Title: Product Family: Product Series: Change Notes: Approvals: **Body Material:**

Contact Type: Coupling Type:

Diameter Over Coupling Ring Mm:

Flamability Rating: Function:

Ip Rating:

Max Operating Temperature: Min Operating Temperature: **Number Of Contacts:**

Pre-Wired Flex SMB Connectors Circular Data Connectors

400 Series - SMB Buccaneer PRODUCT-MOQ-ADJUSTMENT

CSA, UL, VDE

PVC

Plug Contact

Screw 19.1mm

UL94V-0

Flex Connector Single Ended Cable IP68, IP69K

+80°C

-40°C

1 Contact

// Product PDF Links



// Product 3D CAD Model Links

