
## PX0416/5M00 Datasheet



## Product Name // Pre-Wired Flex SMB Connector 5M cable PX0416 Series



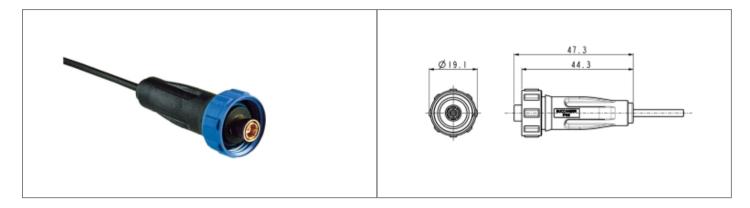

## // Product Description:

- Pre-Wired Flex SMB Connectors
- Water and dustproof to IP68 when mated with compatible connector
- Frequency range 0-4GHz

- Overmoulded connector supplied with 50 Ohm impedance SMB plug terminated with RG-174 cable in a choice of lengths depending on part code
- PX0485 Sealing Cap available separately to maintain IP rating of unmated connectors
- O Mate with PX0414 Panel Connector

## // General Information:

Product Display Title: Product Family: Product Series: Change Notes: Approvals: Body Material:

Contact Type:
Coupling Type:

Diameter Over Coupling Ring Mm: Flamability Rating:

Function:

Ip Rating:
Max Operating Temperature:
Min Operating Temperature:
Number Of Contacts:

Pre-Wired Flex SMB Connectors Circular Data Connectors

400 Series - SMB Buccaneer PRODUCT-MOQ-ADJUSTMENT

PVC Plug Contact Screw 19.1mm UL94V-0

CSA, UL, VDE

Flex Connector Single Ended Cable

IP68, IP69K +80°C -40°C 1 Contact

// Product PDF Links

400 Series SMB connectors product...

// Product 3D CAD Model Links

PX0416/5M003D CAD Model