

PX0460/A Datasheet



Product Name // Front Panel Mount Leaded USB Connector PX0460 Series Sealed A Socket Front of Panel to 5 Way Crimp Connector with exposed braid





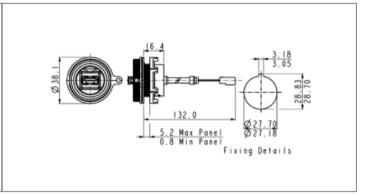

// Product Description:

- 0 Front Panel Mounting Leaded Connector
- 0 Water and dustproof to IP68 when mated with compatible connector
- 0 Sealed Standard USB socket to 125mm long cable terminated in 5 way crimp connector for use with PC header (available separately, part code 14191, 14192)
- PX0843/A has Sealed Standard USB Type A socket on front of
- PX0843/B has Sealed Standard USB Type B socket on front of
- O PX0460/A and PX0460/B are identical to PX0843/A and PX0843/B but with exposed braid for use with PX0465 Screening Can (available separately)
- O PX0733 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PX0840, PX0841 USB Cables

// General Information:

Product Display Title:

Product Family:

Product Series:

Body Material: Body Material Type:

Contact Type:

Coupling Type:

Current Max:

Data Cable Type:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function:

Ip Rating:

Max Operating Temperature: Min Operating Temperature: **Number Of Contacts:**

Voltage Max:

Front Panel Mounting Leaded Connector

Circular Data Connectors

Standard Buccaneer - USB

Polyester (PE) - Glass Filled

Plastic Body Socket Contact

Screw

1A

USB Sealed A Socket to 5 Way Crimp

38.1mm

UL94V-0

Front Panel Mount Connector

IP68. IP69K +70°C

0°C

4 Contacts

30V

// Product PDF Links



// Product 3D CAD Model Links



PX0460/A3D CAD Model