
## PX0460/A3 Datasheet



## Product Name // Front Panel Mount Leaded USB 3.0 Connector PX0460 Series Sealed A Socket Front of Panel to 10 Way Crimp Connector with exposed braid





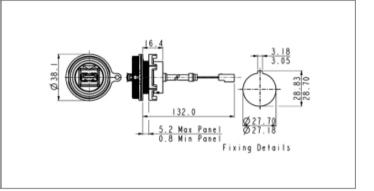

## // Product Description:

- 0 Front Panel Mounting Leaded Connector
- 0 Water and dustproof to IP68 when mated with compatible connector
- Ó Sealed Standard USB 3.0 Type A socket to 200mm long cable terminated in 5 way crimp connector to use with PC header
- Identical to PX0843/A3 but with exposed braid for use with PX0465 Screening Can (available separately)
- O PX0733 Sealing Cap available separately to maintain IP rating of unmated connectors
- O Mate with PX0840, PX0841 USB Cables

## // General Information:

**Product Display Title:** 

**Product Family:** 

**Product Series:** 

**Body Colour: Body Material:** 

**Body Material Type:** 

Contact Type:

Coupling Type:

**Current Max:** 

Data Cable Type:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function:

Ip Rating:

Max Operating Temperature: Min Operating Temperature:

**Number Of Contacts: Rohs Compliant:** Voltage Max:

Front Panel Mounting Leaded Connector

Circular Data Connectors

Standard Buccaneer - USB

Black

Polyester (PE) - Glass Filled

Plastic Body

Socket Contact

Screw

USB 3.0 Sealed A Socket to 10 Way Crimp

38.1mm

UL94V-0

Front Panel Mount Connector

IP68, IP69K +70°C

0°C

9 Contacts

Yes

5V

// Product PDF Links

Standard Series USB connectors...

// Product 3D CAD Model Links



PX0460/A33D CAD Model