
# PX0460/B Datasheet



## Product Name // Front Panel Mount Leaded USB Connector PX0460 Series Sealed B Socket Front of Panel to 5 Way Crimp Connector with exposed braid





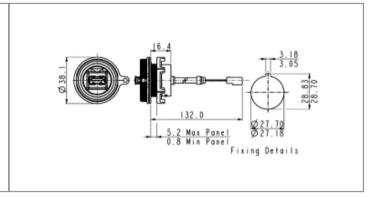

#### // Product Description:

- 0 Front Panel Mounting Leaded Connector
- 0 Water and dustproof to IP68 when mated with compatible connector
- Sealed Standard USB socket to 125mm long cable terminated in 5 way crimp connector for use with PC header (available separately, part code 14191, 14192)
- PX0843/A has Sealed Standard USB Type A socket on front of
- PX0843/B has Sealed Standard USB Type B socket on front of
- 0 PX0460/A and PX0460/B are identical to PX0843/A and PX0843/B but with exposed braid for use with PX0465 Screening Can (available separately)
- O PX0733 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PX0840, PX0841 USB Cables

### // General Information:

**Product Display Title:** 

**Product Family:** 

**Product Series:** 

**Body Material: Body Material Type:** 

Contact Type:

Coupling Type:

**Current Max:** 

Data Cable Type:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function:

Ip Rating:

Max Operating Temperature: Min Operating Temperature:

Voltage Max:

**Number Of Contacts:** 

Front Panel Mounting Leaded Connector

Circular Data Connectors

Standard Buccaneer - USB

Polyester (PE) - Glass Filled

Plastic Body Socket Contact

Screw

1A

38.1mm

USB Sealed B Socket to 5 Way Crimp

UL94V-0

Front Panel Mount Connector

IP68. IP69K +70°C

0°C

4 Contacts

30V

#### // Product PDF Links



// Product 3D CAD Model Links



PX0460/B3D CAD Model

1