


# PX0478/C/C/2M00 Datasheet

**Product Name // 400 Series USB-C Cable Assembly, Flex  
USB-C To Flex USB-C, 2m**

[View Product Page](#)

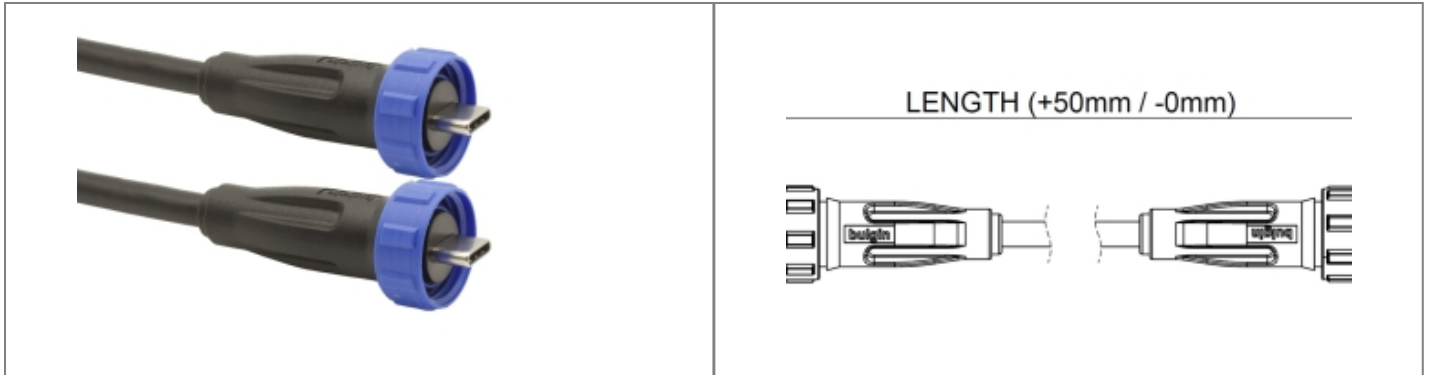

## // Product Description:

- ⊞ Overmoulded C-Type USB 3.2 Gen 2x2 Cable
- ⊞ Sealed C-Type USB plug to Sealed C-Type USB plug
- ⊞ Both USB-C ends sealed to IP68 when mated with compatible connector
- ⊞ 2m cable length
- ⊞ 20Gbps transfer speed, 240W charging
- ⊞ PX0485 Sealing Cap available separately to maintain IP rating of unmated connectors
- ⊞ Mates with PX0472 and PX0473 panel mount connectors

## // General Information:

Product Display Title:	IP-sealed 'C' type to Standard 'A' type USB, 2m of Cable
Product Family:	Circular Data Connectors
Product Series:	400 Data Connectors
Body Material:	PVC/Nylon
Body Material Type:	Plastic Body
Cable Length:	2m
Contact Type:	Plug Contact
Coupling Type:	Screw
Flamability Rating:	UL94V-0
Function:	Flex to Flex Connector Double-Ended Cable
Ip Rating:	IP67, IP68
Max Operating Temperature:	+70°C
Min Operating Temperature:	-35°C
Number Of Contacts:	24 Contacts

### // Product PDF Links

[400 Series C Type USB Buccaneer...](#)

### // Product 3D CAD Model Links

[PX0478/C/C/2M003D CAD Model](#)



Have a question or project enquiry  
you'd like to talk to us about?



[Click Here To Contact Us](#)