


PX0478/C/C/3M00 Datasheet

**Product Name // 400 Series USB-C Cable Assembly, Flex
USB-C To Flex USB-C, 3m**

[View Product Page](#)

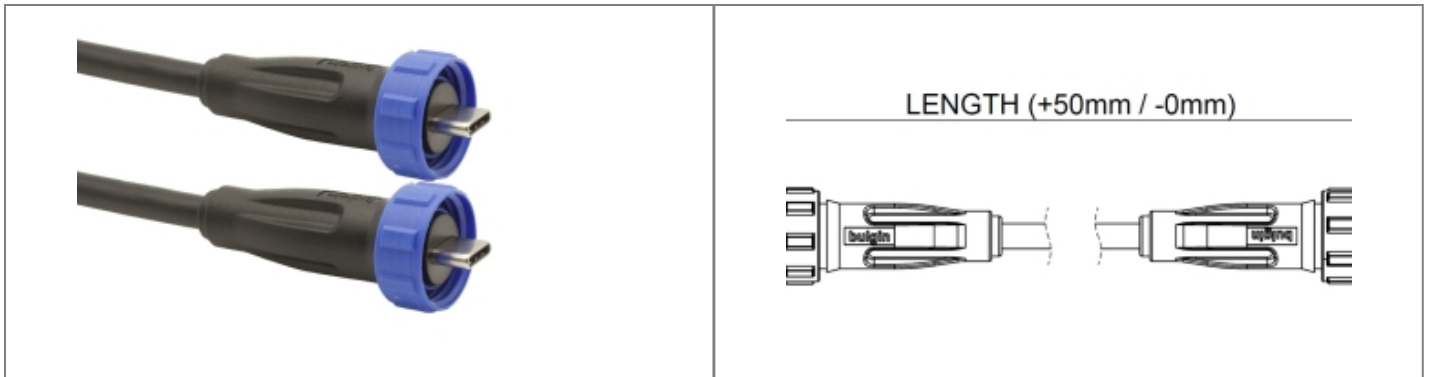

// Product Description:

- ⊞ Overmoulded C-Type USB 3.2 Gen 2 Cable
- ⊞ Sealed C-Type USB plug to Sealed C-Type USB plug
- ⊞ Both USB-C ends sealed to IP68 when mated with compatible connector
- ⊞ 3m cable length
- ⊞ 10Gbps transfer speed, 60W charging
- ⊞ PX0485 Sealing Cap available separately to maintain IP rating of unmated connectors
- ⊞ Mates with PX0472 and PX0473 panel mount connectors

// General Information:

| | |
|----------------------------|--|
| Product Display Title: | IP-sealed 'C' type to Standard 'A' type USB, 3m of Cable |
| Product Family: | Circular Data Connectors |
| Product Series: | 400 Data Connectors |
| Body Material: | PVC/Nylon |
| Body Material Type: | Plastic Body |
| Cable Length: | 3m |
| Contact Type: | Plug Contact |
| Coupling Type: | Screw |
| Flamability Rating: | UL94V-0 |
| Function: | Flex to Flex Connector Double-Ended Cable |
| Ip Rating: | IP67, IP68 |
| Max Operating Temperature: | +70°C |
| Min Operating Temperature: | -35°C |
| Number Of Contacts: | 24 Contacts |

// Product PDF Links

[400 Series C Type USB Buccaneer...](#)

// Product 3D CAD Model Links

[PX0478/C/C/3M003D CAD Model](#)



Have a question or project enquiry
you'd like to talk to us about?



[Click Here To Contact Us](#)