


PX0575/10/28 Datasheet

Product Name // IEC Connector Snap Fit To Panel Inlet
PX0575 Series 1mm Panel Black 2.8mm Solder Tag
Termination EN60 320-1 Standard Sheet C14 Class I

 [View Product Page](#)

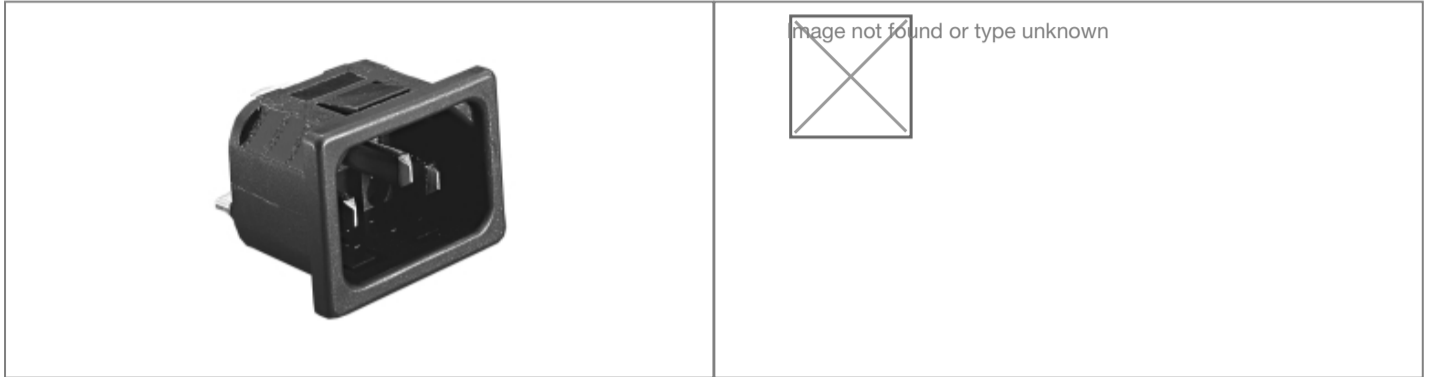

// Product Description:

- ⊕ Snap Fit Panel Mount IEC Inlets
- ⊕ EN60 320-1 Standard Sheet C14 Class I
- ⊕ Cold Condition
- ⊕ Choice of panel thickness depending on part code: /10 - 1mm, /15 - 1.5mm, /20 - 2mm, /30 - 3mm
- ⊕ Choice of Termination depending on part code: /28 - 2.8mm Solder Tag, /48 - 4.8mm Tab, /63 - 6.3mm Tab, /TERM - Screw Terminal, /PC - PCB Spills
- ⊕ Choice of colour depending on part code: /WH - White, /GY - Grey, no suffix - Black (some approvals apply to specific colour only - see data for details)
- ⊕ PCB Mount version (part codes containing /PC) available with rear cover (part codes suffixed /C), for all other versions Insulation Boot for rear of connector available separately (part code 11328)
- ⊕ Mate with PX0587, PX0587/SE, PX0588

// General Information:

| | |
|----------------------------|---------------------------------------|
| Product Display Title: | Snap Fit Panel Mount IEC Inlets |
| Product Family: | IEC Connectors |
| Product Series: | IEC60320 Main Inlets and Outlets |
| Approvals: | ENEC, cULus, VDE |
| Body Material: | Nylon 66 |
| Current Max: | 10A, 15A |
| Flamability Rating: | UL94V-0 |
| Function: | Panel Mount Connector |
| iec Connector Colour: | Black |
| iec Connector Mates With: | PX0587,PX0587/SE,PX0588 |
| iec En60620 Type: | EN60 320-1 Standard Sheet C14 Class I |
| Max Operating Temperature: | +70°C |
| Min Operating Temperature: | -40°C |
| Max Panel Thickness: | 1mm |
| Min Panel Thickness: | 1mm |
| Number Of Contacts: | 3 Contacts |
| Voltage Max: | 250V |


// Product PDF Links

 [IEC Connectors product data](#)

// Product 3D CAD Model Links

 [PX0575/10/283D CAD Model](#)

// Product Certificate Links

 [UL E70394 Certificate](#)