
## PX0700/P/02 Datasheet



# Product Name // Pre-Wired Overmould Flex Cable Connector PX0700 Series 2 Contact Plug Black Insert



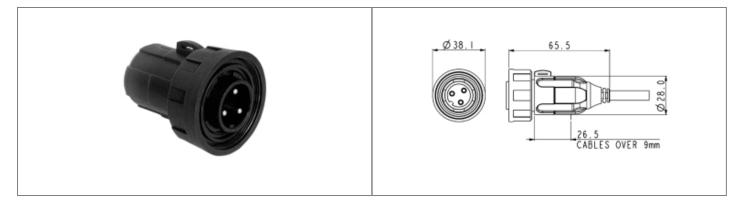

### // Product Description:

- O Pre-Wired Overmoulded Flex Connector cable assemblies
- Water and dustproof to IP68 when mated with compatible connector
- O Plug or Socket
- 2, 3, 4, 6, 7, 9, 12, 25 Contact with leading Earth contact on 3 Contact Socket versions
- O Cable acceptance up to 14mm diameter with PVC or PU jackets
- PX0734 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PX07 Series Inline and Panel Mount Connectors

#### // General Information:

**Product Display Title:** 

Product Family: Product Series:

Approvals:

Approvals:

Body Material:

Contact Type: Coupling Type:

Current Max:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function:

Insert Colour: Ip Rating:

Max Operating Temperature:

Min Operating Temperature:

Number Of Contacts:

Voltage Max:

Pre-Wired Overmoulded Flex Connector cable assemblies

Circular Power Connectors

Standard Buccaneer

CSA, UL, VDE

Polyamide (PA)- Glass Filled

Plug Contact

Screw

10A, 12A 38.1mm

UL94HB

Flex Connector Single Ended Cable

Black Insert

IP68, IP69K

+70°C

2 Contacts

277V

#### // Product PDF Links



#### // Product 3D CAD Model Links

