
# PX0700/P/06 Datasheet



## Product Name // Pre-Wired Overmould Flex Cable Connector PX0700 Series 6 Contact Plug Black Insert



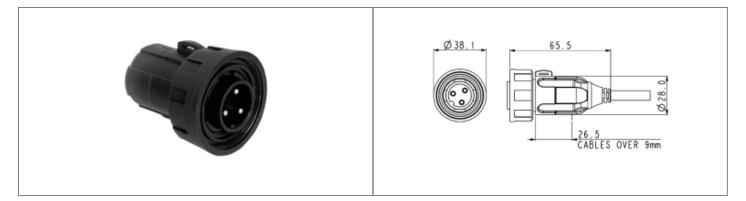

#### // Product Description:

- a Pre-Wired Overmoulded Flex Connector cable assemblies
- 0 Water and dustproof to IP68 when mated with compatible connector
- 0 Plug or Socket
- 0 2, 3, 4, 6, 7, 9, 12, 25 Contact with leading Earth contact on 3 Contact Socket versions
- $\cap$ Cable acceptance up to 14mm diameter with PVC or PU jackets
- PX0734 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PX07 Series Inline and Panel Mount Connectors

#### // General Information:

**Product Display Title:** 

**Product Family: Product Series:** 

Approvals:

**Body Material:** 

Contact Type:

Coupling Type:

**Current Max:** 

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function:

Insert Colour: Ip Rating:

Max Operating Temperature:

Min Operating Temperature:

**Number Of Contacts:** 

Voltage Max:

Pre-Wired Overmoulded Flex Connector cable assemblies

Circular Power Connectors

Standard Buccaneer

CSA, UL, VDE

Polyamide (PA)- Glass Filled

Plug Contact

Screw

3A, 5A 38.1mm

UL94HB

Flex Connector Single Ended Cable

Black Insert

IP68, IP69K

+70°C

-20°C

6 Contacts 277V





### // Product 3D CAD Model Links

