
PX0700/P/07 Datasheet



Product Name // Pre-Wired Overmould Flex Cable Connector PX0700 Series 7 Contact Plug Black Insert



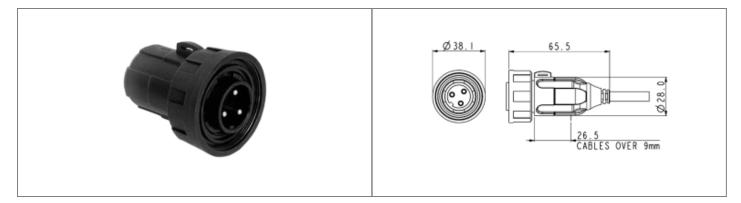

// Product Description:

- a Pre-Wired Overmoulded Flex Connector cable assemblies
- 0 Water and dustproof to IP68 when mated with compatible connector
- 0 Plug or Socket
- 0 2, 3, 4, 6, 7, 9, 12, 25 Contact with leading Earth contact on 3 Contact Socket versions
- \cap Cable acceptance up to 14mm diameter with PVC or PU jackets
- PX0734 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PX07 Series Inline and Panel Mount Connectors

// General Information:

Product Display Title:

Product Family: Product Series:

Approvals:

Body Material:

Contact Type:

Coupling Type:

Current Max:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function: Insert Colour:

Ip Rating:

Max Operating Temperature:

Min Operating Temperature: **Number Of Contacts:**

Voltage Max:

Pre-Wired Overmoulded Flex Connector cable assemblies

Circular Power Connectors

Standard Buccaneer

CSA, UL, VDE

Polyamide (PA)- Glass Filled

Plug Contact

Screw

3A, 5A

38.1mm UL94HB

Flex Connector Single Ended Cable

Black Insert

IP68, IP69K

+70°C -20°C

7 Contacts

277V

// Product PDF Links



// Product 3D CAD Model Links



PX0700/P/073D CAD Model