
PX0700/P/25 Datasheet



Product Name // Pre-Wired Overmould Flex Cable Connector PX0700 Series 25 Contact Plug Black Insert





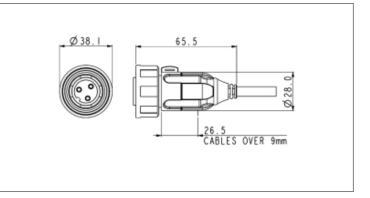

// Product Description:

- O Pre-Wired Overmoulded Flex Connector cable assemblies
- Water and dustproof to IP68 when mated with compatible connector
- O Plug or Socket
- 2, 3, 4, 6, 7, 9, 12, 25 Contact with leading Earth contact on 3 Contact Socket versions
- Cable acceptance up to 14mm diameter with PVC or PU jackets
- PX0734 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PX07 Series Inline and Panel Mount Connectors

// General Information:

Product Display Title:

Product Family: Product Series:

Approvals:

Body Material:

Contact Type:

Coupling Type: Current Max:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function:

Insert Colour: Ip Rating:

Max Operating Temperature:

Min Operating Temperature: Number Of Contacts:

Number of Contacts:

Voltage Max:

Pre-Wired Overmoulded Flex Connector cable assemblies

Circular Power Connectors

Standard Buccaneer

CSA, UL, VDE

Polyamide (PA)- Glass Filled

Plug Contact

Screw

38.1mm

UL94HB

Flex Connector Single Ended Cable

Black Insert

IP68, IP69K

+70°C

-20°C

25 Contacts

50V

// Product PDF Links



// Product 3D CAD Model Links

