
PX0700/S/02 Datasheet



Product Name // Pre-Wired Overmould Flex Cable Connector PX0700 Series 2 Contact Socket Black Insert





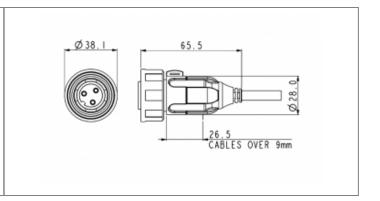

// Product Description:

- O Pre-Wired Overmoulded Flex Connector cable assemblies
- Water and dustproof to IP68 when mated with compatible connector
- O Plug or Socket
- 2, 3, 4, 6, 7, 9, 12, 25 Contact with leading Earth contact on 3 Contact Socket versions
- O Cable acceptance up to 14mm diameter with PVC or PU jackets
- PX0734 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PX07 Series Inline and Panel Mount Connectors

// General Information:

Product Display Title:

Product Family:

Product Series:

Approvals:

Body Material:

Contact Type:

Coupling Type:

Current Max:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function:

Insert Colour:

Ip Rating:

Max Operating Temperature:

Min Operating Temperature: Number Of Contacts:

Number Of Contacts

Voltage Max:

Pre-Wired Overmoulded Flex Connector cable assemblies

Circular Power Connectors

Standard Buccaneer

CSA, UL, VDE

Polyamide (PA)- Glass Filled

Socket Contact

Screw

10A, 12A 38.1mm

UL94HB

Flex Connector Single Ended Cable

Black Insert IP68, IP69K

+70°C

-20°C

2 Contacts

277V





Standard Series nower connectors