


PX0725/15/48 Datasheet

Product Name // IEC Connector Snap Fit To Panel Outlet 2

Pin PX0725 Series 1.5mm Panel Black 4.8mm Tab

Termination EN60 320-2-2 Standard Sheet H Class II

 [View Product Page](#)

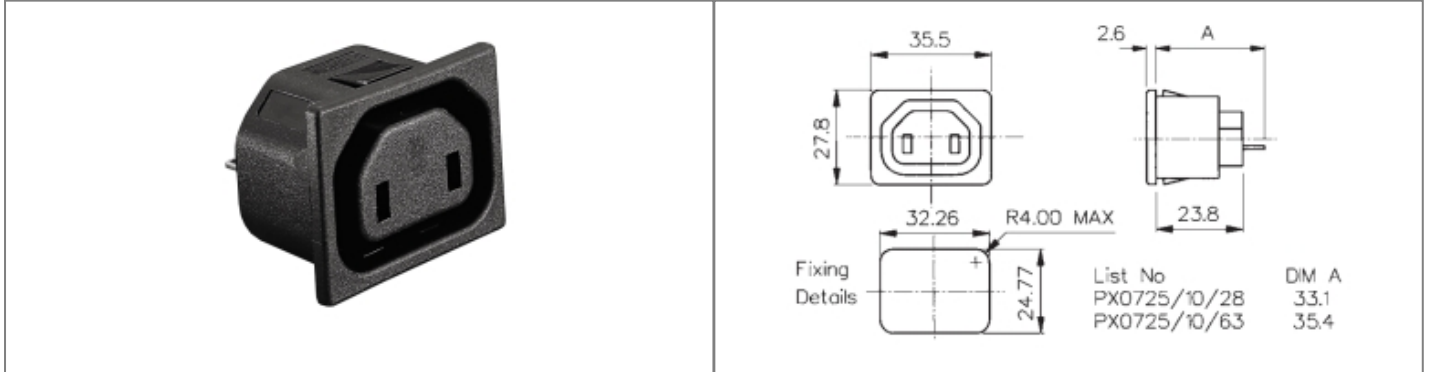

// Product Description:

- ⊕ Snap Fit To Panel Mount IEC Outlets
- ⊕ EN60 320-2-2 Standard Sheet H Class II
- ⊕ Two Pin Class II (no Earth pin)
- ⊕ Choice of panel thickness depending on part code: /10 - 1mm, /15 - 1.5mm, /20 - 2mm, /30 - 3mm
- ⊕ Choice of Termination depending on part code: /28 - 2.8mm Solder Tag, /48 - 4.8mm Tab, /63 - 6.3mm Tab
- ⊕ Choice of colour depending on part code: /WH - White, /GY - Grey, no suffix - Black (some approvals apply to specific colour and/or Termination choices only - see data for details)
- ⊕ Insulation Boot for rear of connector available separately (part code 12075)


// General Information:

| | |
|----------------------------|--|
| Product Display Title: | Snap Fit To Panel Mount IEC Outlets |
| Product Family: | IEC Connectors |
| Product Series: | IEC60320 Main Inlets and Outlets |
| Approvals: | CSA, ENEC, VDE |
| Body Material: | Nylon 66 |
| Current Max: | 10A, 15A |
| Flamability Rating: | UL94V-0 |
| Function: | Panel Mount Connector |
| iec Connector Colour: | Black |
| iec En60620 Type: | EN60 320-2-2 Standard Sheet H Class II |
| Max Operating Temperature: | +70°C |
| Min Operating Temperature: | -40°C |
| Max Panel Thickness: | 1.5mm |
| Min Panel Thickness: | 1.5mm |
| Number Of Contacts: | 2 Contacts |
| Voltage Max: | 250V |

// Product PDF Links

 [IEC Connectors product data](#)

// Product 3D CAD Model Links

 [PX0725/15/483D CAD Model](#)