


PX0728/P/04/LG1 Datasheet

Product Name // Flex Cable Connector PX0728 Range 9
Contact Plug Crimp Termination (Contacts Supplied Loose)
3.5mm-5mm Cable Light Grey Insert And Gland Nut

 [View Product Page](#)

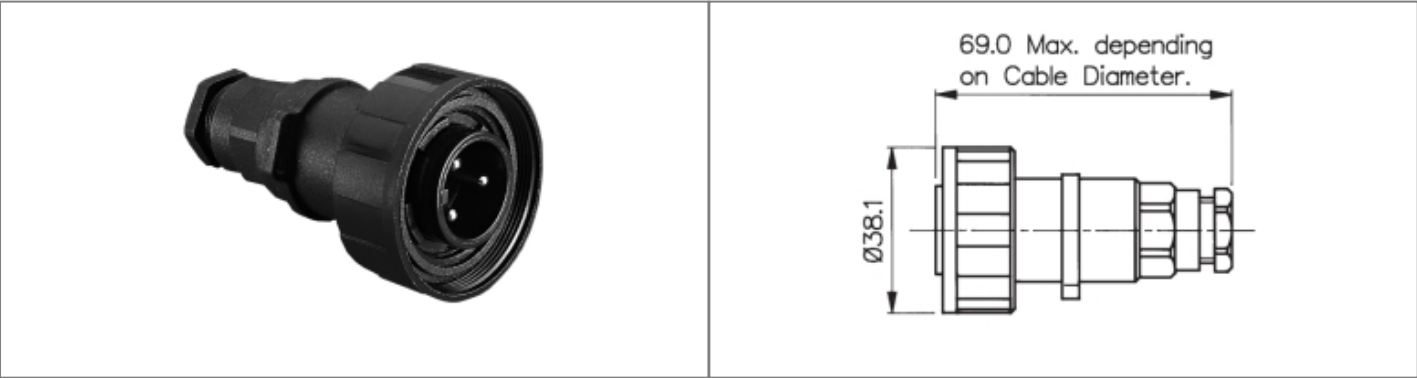

// **Product Description:**

- Flex Cable Connectors
 - Water and dustproof to IP68 when mated with compatible connector
 - Plug or Socket
 - 2, 3, 4, 6, 7, 9, 12, 25 Contact with leading Earth contact on 3 Contact Socket versions
 - Screw, Crimp, Crimp/Solder Terminations depending on part code and number of Contacts
 - Screw contacts supplied fitted, Crimp contacts supplied loose (Crimp/Solder contacts and fitting tools available separately)
 - Choice of cable acceptance 3.5mm-9mm diameter depending on part code (see data for details)
- Cable Glands for differing cable diameters available separately individually or in packs
 - Cable Support accessory 12237 available separately to provide extra support for smaller cables (5mm-9mm diameter)
 - Choice of coloured inserts/gland nuts to enable positive visual identification of connector:
 - Part codes suffixed with a colour code followed by 2 have that colour insert with black gland nut, part codes suffixed with a colour code followed by 1 have the same colour insert and gland nut
 - Colour choices and colour codes: Blue (BL), Green (GN), Grey (GY), Light Grey (LG), Red (RD), White (WH), Yellow (YL), Black (standard colour, no suffix code)
 - PX0734 Sealing Cap available separately to maintain IP rating of unmated connectors
 - Mate with PX07 Series Inline and Panel Mount Connectors

// **General Information:**

Product Display Title:	Flex Cable Connectors
Product Family:	Circular Power Connectors
Product Series:	Standard Buccaneer
Approvals:	CSA, UL, VDE
Body Material:	Polyamide (PA)- Glass Filled
Body Material Type:	Plastic Body
Contact Type:	Plug Contact
Coupling Type:	Screw
Current Max:	5A
Diameter Over Coupling Ring Mm:	38.1mm
Flamability Rating:	UL94HB
Function:	Flex Cable Connector
Insert Colour:	Light Grey Insert And Gland Nut
Ip Rating:	IP68, IP69K
Max Cable Entry Size:	5mm
Min Cable Entry Size:	3.5mm
Max Contact Accomodation Awg:	26AWG
Min Contact Accomodation Awg:	24AWG
Max Contact Accomodation Mm2:	0.25mm2
Min Contact Accomodation Mm2:	0.14mm2
Max Operating Temperature:	+70°C
Min Operating Temperature:	-20°C
Number Of Contacts:	9 Contacts
Voltage Max:	150V

// **Product PDF Links**

-  [Standard Series power connectors...](#)
-  [Standard Series power connectors...](#)

// **Product 3D CAD Model Links**

-  [PX0728/P/04/LG13D CAD Model](#)



Have a question or project enquiry
you'd like to talk to us about?



[Click Here To Contact Us](#)