
PX0730/S/YL2 Datasheet



Product Name // Front Panel Mount Connector PX0730 Series 3 Contact Socket Screw Termination (Contacts Supplied Fitted) Yellow Insert

View Product Page



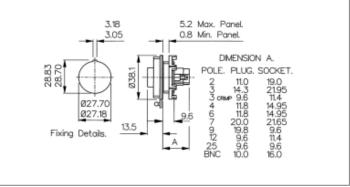

// Product Description:

- Front Panel Mount Connectors
- Water and dustproof to IP68 when mated with compatible connector
- O Single hole fixing
- O Plug or Socket
- 2, 3, 4, 6, 7, 9, 12, 25 Contact with leading Earth contact on 3 Contact Socket versions
- Screw, Crimp, Crimp/Solder Terminations available depending on part code and number of Contacts
- O Screw contacts supplied fitted, Crimp contacts supplied loose (Crimp/Solder contacts and fitting tools available separately)
- O Choice of coloured inserts to enable positive visual identification of connector:
- Part codes suffixed with a colour code followed by 2 have that colour insert
- Colour choices and colour codes: Blue (BL), Green (GN), Grey (GY), Light Grey (LG), Red (RD), White (WH), Yellow (YL), Black (standard colour, no suffix code)
- PX0799 rear of panel back shell and 12855 Insulation Boot available separately
- PX0733 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PX07 Series Flex Connectors

// General Information:

Product Display Title: Product Family: Product Series:

Approvals: Body Material:

Body Material Type: Contact Type:

Coupling Type:
Current Max:

Diameter Over Coupling Ring Mm:

Flamability Rating: Function:

Insert Colour: Ip Rating:

Max Operating Temperature: Min Operating Temperature: Number Of Contacts: Voltage Max: Front Panel Mount Connectors
Circular Power Connectors

Standard Buccaneer CSA, UL, VDE

Polyamide (PA)- Glass Filled

Plastic Body Socket Contact Screw

10A, 12A 38.1mm UL94HB

Front Panel Mount Connector

Yellow Insert IP68, IP69K +70°C -20°C 3 Contacts 277V

