
PX0758/S/LG2 Datasheet



Product Name // Bulkhead Flange Mount Connector PX0758 Series 6 Contact Socket Screw Termination (Contacts Supplied Fitted) Light Grey Insert

View Product Page



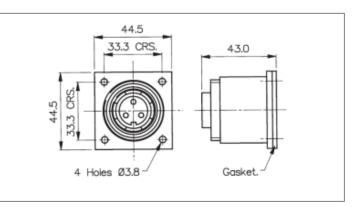

// Product Description:

- 0 Bulkhead Flange Mount Connectors
- 0 Water and dustproof to IP68 when mated with compatible connector
- 0 Screw fixing flange, supplied with sealing gasket and screw sealing grommets
- 0 Plug or Socket
- 2, 3, 4, 6, 7, 9, 12, 25 Contact with leading Earth contact on 3 Contact Socket versions
- Screw, Crimp, Crimp/Solder Terminations available, depending on part code and number of Contacts
- O Screw contacts supplied fitted, Crimp contacts supplied loose (Crimp/Solder contacts and fitting tools available separately)
- Choice of coloured inserts to enable positive visual identification of connector:
- 0 Part codes suffixed with a colour code followed by 2 have that colour insert
- 0 Colour choices and colour codes: Blue (BL), Green (GN), Grey (GY), Light Grey (LG), Red (RD), White (WH), Yellow (YL), Black (standard colour, no suffix code)
- PX0733 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PX07 Series Flex Connectors

General Information:

Product Display Title:

Product Family:

Product Series: Approvals:

Body Material:

Contact Type:

Coupling Type:

Current Max:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function:

Insert Colour:

Ip Rating:

Max Operating Temperature: Min Operating Temperature: **Number Of Contacts:**

Voltage Max:

Bulkhead Flange Mount Connectors

Circular Power Connectors

Standard Buccaneer CSA, UL, VDE

Polyamide (PA)- Glass Filled

Socket Contact

Screw

3A, 5A 38.1mm

UL94HB

Bulkhead Flange Mount Connector

Light Grey Insert

IP68, IP69K

+70°C -20°C

6 Contacts

277V



Standard Series power connectors..



Standard Series power connectors.

// Product 3D CAD Model Links

PX0758/S/LG23D CAD Model