


PX0760/S/GY2 Datasheet

Product Name // Bulkhead Flange Mount Connector
PX0760 Series 7 Contact Socket Screw Termination
(Contacts Supplied Fitted) Grey Insert

 [View Product Page](#)

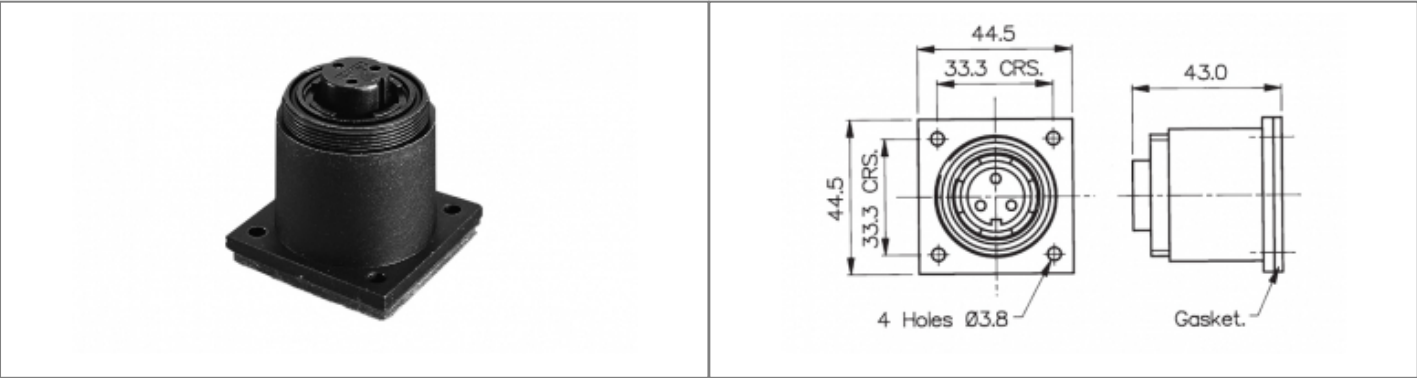

// Product Description:	
- Bulkhead Flange Mount Connectors - Water and dustproof to IP68 when mated with compatible connector - Screw fixing flange, supplied with sealing gasket and screw sealing grommets - Plug or Socket 2, 3, 4, 6, 7, 9, 12, 25 Contact with leading Earth contact on 3 Contact Socket versions - Screw, Crimp, Crimp/Solder Terminations available, depending on part code and number of Contacts	- Screw contacts supplied fitted, Crimp contacts supplied loose (Crimp/Solder contacts and fitting tools available separately) - Choice of coloured inserts to enable positive visual identification of connector: - Part codes suffixed with a colour code followed by 2 have that colour insert - Colour choices and colour codes: Blue (BL), Green (GN), Grey (GY), Light Grey (LG), Red (RD), White (WH), Yellow (YL), Black (standard colour, no suffix code) - PX0733 Sealing Cap available separately to maintain IP rating of unmated connectors - Mate with PX07 Series Flex Connectors

// General Information:	
Product Display Title: Product Family: Product Series: Approvals: Body Material: Contact Type: Coupling Type: Current Max: Diameter Over Coupling Ring Mm: Flamability Rating: Function: Insert Colour: Ip Rating: Max Operating Temperature: Min Operating Temperature: Number Of Contacts: Voltage Max:	Bulkhead Flange Mount Connectors Circular Power Connectors Standard Buccaneer CSA, UL, VDE Polyamide (PA)- Glass Filled Socket Contact Screw 3A, 5A 38.1mm UL94HB Bulkhead Flange Mount Connector Grey Insert IP68, IP69K +70°C -20°C 7 Contacts 277V

// Product PDF Links

 [Standard Series power connectors...](#)

 [Standard Series power connectors...](#)