
PX0768/S/YL2 Datasheet



Product Name // Low Profile Flange Mount Connector **PX0768 Series 7 Contact Socket Screw Termination** (Contacts Supplied Fitted) Yellow Insert

View Product Page



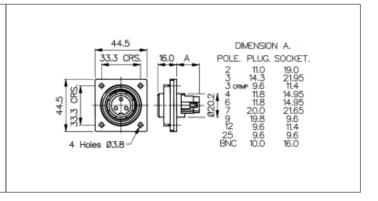

// Product Description:

- 0 Low Profile Flange Mount Connectors
- 0 Water and dustproof to IP68 when mated with compatible
- 0 Screw fixing flange, supplied with sealing gasket and screw sealing grommets
- 0 Plug or Socket
- 0 2, 3, 4, 6, 7, 9, 12, 25 Contact with leading Earth contact on 3 Contact Socket versions
- Screw, Crimp, Crimp/Solder Terminations available, depending on part code and number of Contacts
- Screw contacts supplied fitted, Crimp contacts supplied loose (Crimp/Solder contacts and fitting tools available separately)
- Choice of coloured inserts to enable positive visual identification of connector:
- 0 Part codes suffixed with a colour code followed by 2 have that colour insert
- 0 Colour choices and colour codes: Blue (BL), Green (GN), Grey (GY), Light Grey (LG), Red (RD), White (WH), Yellow (YL), Black (standard colour, no suffix code)
- PX0733 Sealing Cap available separately to maintain IP rating of unmated connectors
- 0 Mate with PX07 Series Flex Connectors

General Information:

Product Display Title:

Product Family:

Product Series:

Approvals:

Body Material:

Body Material Type:

Contact Type: Coupling Type:

Current Max:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function:

Insert Colour:

Max Operating Temperature:

Ip Rating:

Min Operating Temperature:

Number Of Contacts: Voltage Max:

Low Profile Flange Mount Connectors

Circular Power Connectors

Standard Buccaneer

CSA, UL, VDE

Polyamide (PA)- Glass Filled

Plastic Body

Socket Contact

Screw 3A. 5A

38.1mm

UL94HB

Low Profile Flange Mount Connector

Yellow Insert IP68, IP69K

+70°C

-20°C 7 Contacts

277V



// Product 3D CAD Model Links PX0768/S/YL23D CAD Model

Click Here To Contact Us