
PX0787/P/LG2 Datasheet



Product Name // Bulkhead Flange Mount Connector **PX0787 Series 3 Contact Plug Crimp Termination (Contacts Supplied Loose) Light Grey Insert**

View Product Page



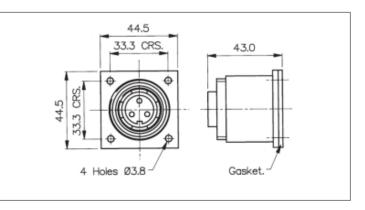

// Product Description:

- 0 Bulkhead Flange Mount Connectors
- 0 Water and dustproof to IP68 when mated with compatible connector
- 0 Screw fixing flange, supplied with sealing gasket and screw sealing grommets
- 0 Plug or Socket
- 2, 3, 4, 6, 7, 9, 12, 25 Contact with leading Earth contact on 3 Contact Socket versions
- Screw, Crimp, Crimp/Solder Terminations available, depending on part code and number of Contacts
- Screw contacts supplied fitted, Crimp contacts supplied loose (Crimp/Solder contacts and fitting tools available separately)
- Choice of coloured inserts to enable positive visual identification of connector:
- 0 Part codes suffixed with a colour code followed by 2 have that colour insert
- 0 Colour choices and colour codes: Blue (BL), Green (GN), Grey (GY), Light Grey (LG), Red (RD), White (WH), Yellow (YL), Black (standard colour, no suffix code)
- PX0733 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PX07 Series Flex Connectors

General Information:

Product Display Title:

Product Family: Product Series:

Approvals:

Body Material:

Contact Type:

Coupling Type:

Current Max:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function:

Insert Colour:

Max Operating Temperature: Min Operating Temperature:

Number Of Contacts:

Voltage Max:

Bulkhead Flange Mount Connectors

Circular Power Connectors

Standard Buccaneer CSA, UL, VDE

Polyamide (PA)- Glass Filled

Plug Contact

Screw

10A, 12A

38.1mm

UL94HB

Bulkhead Flange Mount Connector


Light Grey Insert

IP68, IP69K +70°C

-20°C

3 Contacts

277V





Standard Series power connectors..



Standard Series power connectors.

// Product 3D CAD Model Links

PX0787/P/LG23D CAD Model