


PX0801/04 Datasheet

Product Name // Mini Series Inline Cable Connector Body
3.5mm-5mm Cable (Grey Gland)

 [View Product Page](#)

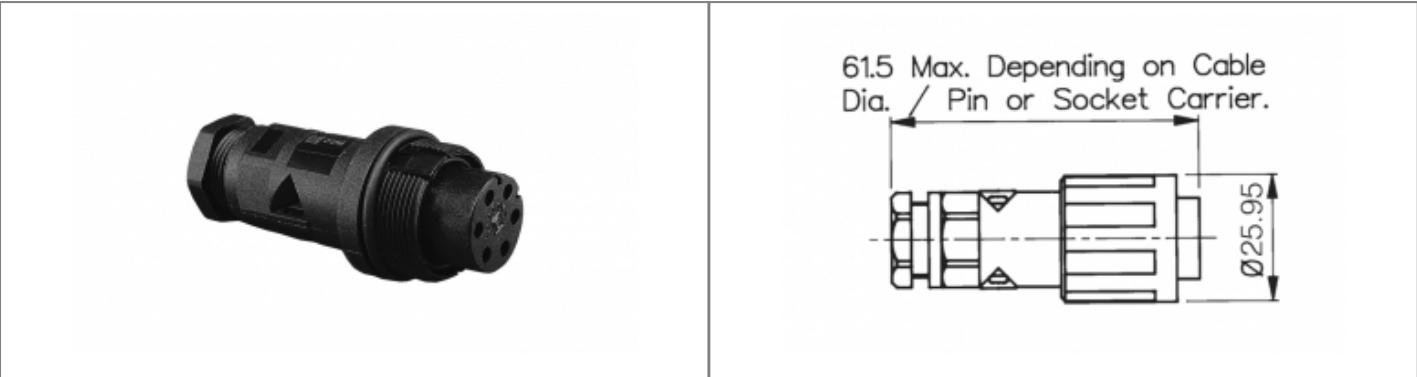

// Product Description:

Mini Series of modular connectors

Water and dustproof to IP68 when mated with compatible connector

Choose type of connector body:

Part codes prefixed PX0800 - Flex Cable Connectors (mate with PX0801 Inline Cable Connectors, PX08 Mini Series Panel Mount Connectors), optionally choose cable acceptance

Part codes prefixed PX0801 - Inline Cable Connectors (mate with PX0800 Flex Cable Connectors), optionally choose cable acceptance

Part codes prefixed PX0802, PX0803, PX0804, PX0805 - Panel Mount Connectors (mate with PX08 Mini Series Flex Cable Connectors)

Choose type of contacts from Screw Terminal, Solder/Crimp Contacts, BNC

Choose number of connector Contacts and select appropriate connector insert/contact carrier:

Screw Terminal inserts available separately in 2, 3, 4, 6 Contact, Pin or Socket

Solder, Crimp Contact carriers available separately in 3, 8 Contact; select appropriate Contact Pins or Sockets and Polarising/Blanking Pins, Contact Insertion Tool, Crimping Tool as required (all available separately)

BNC Plug or Socket insert available separately in 50 Ohm, 75 Ohm versions for all connector body styles except PX0803

PX0800, PX0801 Flex and Inline Cable Connector bodies have a choice of cable acceptance 3.5mm-9mm diameter depending on part code (see data for details)

Pack of Cable Glands for differing cable sizes also available separately (PX0812)

Sealing Caps (available separately) can be used to maintain IP rating of unmated connectors:

PX0811 fits PX0800 Flex Cable Connector

PX0810 fits all other connectors in the PX08 Mini Series

// General Information:

Product Display Title:

Product Family:

Product Series:

Approvals:

Body Material:

Body Material Type:

Coupling Type:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function:

Ip Rating:

Max Cable Entry Size:

Min Cable Entry Size:

Max Operating Temperature:

Min Operating Temperature:

Mini Series of modular connectors

Circular Power Connectors

Mini Buccaneer

UL

Polyamide (PA)

Plastic Body

Screw

26mm

UL94V-0

Inline Cable Connector Body

IP68

5mm

3.5mm

+70°C

-20°C

// Product PDF Links

 Mini Series power connectors...

 Mini Series connectors wiring...