
PX0837/2M00 Datasheet



Product Name // Overmould Flex Connector PX0837 Series Pre-Wired Patch Cord IP68 RJ45 to Shielded RJ45 2M Cable





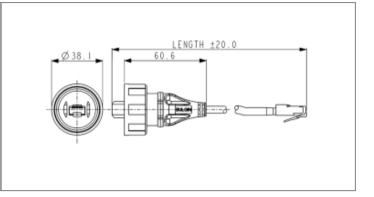

// Product Description:

- 0 Cat 5e and Cat 6a Options
- Ó Pre-Wired Patch Cord with overmoulded connector(s)
- 0 Water and dustproof to IP68 when mated with compatible connector
- a Supplied with shielded RJ45 plug
- O S-FTP cable construction
- 0 PUR jacket cable in a choice of lengths depending on part code suffix
- Ó Choice of:
- O IP68 RJ45 to bare end (part codes prefixed PX0836, PX0896)
- 0 IP68 RJ45 to Shielded RJ45 (part codes prefixed PX0837, PX0897)
- a IP68 RJ45 to IP68 RJ45 (part codes prefixed PX0838, PX0898)
- O PX0835 Sealing Cap available separately to maintain IP rating of unmated connectors
- a Mate with all PX08 Standard Series RJ45 Panel Mount Connectors

// General Information:

Product Display Title: Cat 5e and Cat 6a Options **Product Family:** Circular Data Connectors **Product Series:** Standard Buccaneer - Ethernet PRODUCT-MOQ-ADJUSTMENT **Change Notes:**

PVC **Body Material:** Cable Length: 2m Contact Type: Plug Contact Coupling Type: Screw **Current Max:** 1.5A

Data Cable Type: IP68 RJ45 to Shielded RJ45

Diameter Over Coupling Ring Mm: UL94V-0 Flamability Rating:

Function: Flex to Standard Connector Double Ended Cable

IP68, IP69K Ip Rating: Max Operating Temperature: +70°C -20°C Min Operating Temperature: **Number Of Contacts:** 8 Contacts

Rohs Compliant: Yes Voltage Max: 42V

// Product PDF Links





PX0837/2M003D CAD Model