
PX0837/2M00 Datasheet



Product Name // Overmould Flex Connector PX0837 Series Pre-Wired Patch Cord IP68 RJ45 to Shielded RJ45 2M Cable





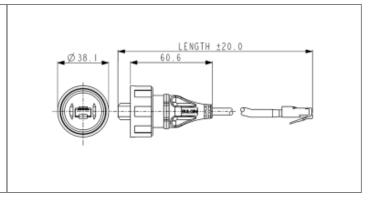

// Product Description:

- O Cat 5e and Cat 6a Options
- O Pre-Wired Patch Cord with overmoulded connector(s)
- Water and dustproof to IP68 when mated with compatible connector.
- O Supplied with shielded RJ45 plug
- O S-FTP cable construction
- PUR jacket cable in a choice of lengths depending on part code suffix
- O Choice of:
- Q IP68 RJ45 to bare end (part codes prefixed PX0836, PX0896)
- O IP68 RJ45 to Shielded RJ45 (part codes prefixed PX0837, PX0897)
- O IP68 RJ45 to IP68 RJ45 (part codes prefixed PX0838, PX0898)
- PX0835 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with all PX08 Standard Series RJ45 Panel Mount Connectors

// General Information:

Product Display Title:Cat 5e and Cat 6a OptionsProduct Family:Circular Data ConnectorsProduct Series:Standard Buccaneer - EthernetChange Notes:PRODUCT-MOQ-ADJUSTMENTIs Vitalis:NoBody Material:PVC

 Cable Length:
 2m

 Contact Type:
 Plug Contact

 Coupling Type:
 Screw

 Current Max:
 1.5A

 Data Cable Type:
 IP68 RJ45 to

Data Cable Type:IP68 RJ45 to Shielded RJ45Diameter Over Coupling Ring Mm:38.1mm

Flamability Rating: UL94V-0

Function: Flex to Standard Connector Double Ended Cable

Ip Rating:IP68, IP69KMax Operating Temperature:+70°CMin Operating Temperature:-20°CNumber Of Contacts:8 ContactsRohs Compliant:YesVoltage Max:42V





