
PX0840/A/1M00 Datasheet



Product Name // Overmoulded USB Cable PX0840 Series **USB Standard B Plug to Sealed A Plug 1M Cable**





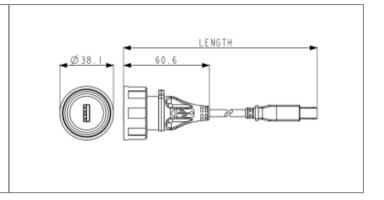

// Product Description:

- 0 Pre-Wired Overmoulded USB V2.0 Cable
- 0 Water and dustproof to IP68 when mated with compatible connector
- 0 Two versions:
- 0 Part codes containing /A are Standard USB Type B plug to Sealed Standard USB Type A plug
- O Part codes containing /B are Standard USB Type A plug to Sealed Standard USB Type B plug
- O Choice of cable lengths depending on part code suffix
- O PX0835 Sealing Cap available separately to maintain IP rating of unmated connectors
- O Mate with PX08 Standard USB Series Panel Mount Connectors

// General Information:

Product Display Title:

Product Family:

Product Series:

Approvals:

Body Material:

Cable Length:

Contact Type: Coupling Type:

Current Max:

Data Cable Type:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function:

Ip Rating:

Max Operating Temperature: Min Operating Temperature: **Number Of Contacts:**

Voltage Max:

Pre-Wired Overmoulded USB V2.0 Cable

Circular Data Connectors

Standard Buccaneer - USB

CSA, UL, VDE

PVC

1m

Plug Contact

Screw

1A

USB Standard B Plug to Sealed A Plug

38.1mm

Flex to Standard Connector Double Ended Cable

IP68, IP69K

+70°C

0°C

30V





// Product 3D CAD Model Links



PX0840/A/1M003D CAD Model