
PX0840/A/2M00 Datasheet



Product Name // Overmoulded USB Cable PX0840 Series USB Standard B Plug to Sealed A Plug 2M Cable





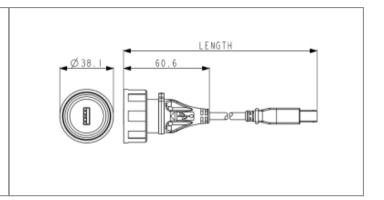

// Product Description:

- O Pre-Wired Overmoulded USB V2.0 Cable
- Q Water and dustproof to IP68 when mated with compatible connector
- O Two versions:
- Part codes containing /A are Standard USB Type B plug to Sealed Standard USB Type A plug
- Part codes containing /B are Standard USB Type A plug to Sealed Standard USB Type B plug
- O Choice of cable lengths depending on part code suffix
- PX0835 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PX08 Standard USB Series Panel Mount Connectors

// General Information:

Product Display Title: Product Family:

Product Series:

Change Notes:

Approvals:

Approvals: Body Material:

Cable Length:

Contact Type:

Coupling Type:

Current Max:

Data Cable Type:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function:

Ip Rating:

Max Operating Temperature: Min Operating Temperature: Number Of Contacts:

Rohs Compliant:

Voltage Max:

Pre-Wired Overmoulded USB V2.0 Cable

Circular Data Connectors

Standard Buccaneer - USB

PRODUCT-MOQ-ADJUSTMENT

CSA, UL, VDE

PVC

2m

Plug Contact

Screw

1A

USB Standard B Plug to Sealed A Plug

38.1mm

UL94V-0

Flex to Standard Connector Double Ended Cable

IP68, IP69K

+70°C

0°C

4 Contacts

Yes 30V

// Product PDF Links



// Product 3D CAD Model Links

