
# PX0840/A3/3M00 Datasheet

## Product Name // Overmoulded USB 3.0 Cable PX0840 Series USB Standard A Plug to Sealed A Plug 3m Cable

View Product Page



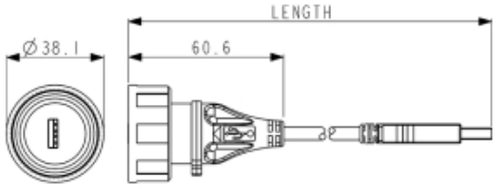


## // Product Description:

- Pre-Wired Overmoulded USB 3.0 Cable
- Water and dustproof to IP68 when mated with compatible connector
- Standard USB 3.0 Type A plug to Sealed Standard USB 3.0 Type A plug
- 3m Cable Length
- PX0835 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PX08 Standard USB 3.0 Series Panel Mount Connectors

## // General Information:

| | |
|---|---|
| **Product Display Title:** | Pre-Wired Overmoulded USB 3.0 Cable |
| **Product Family:** | Circular Data Connectors |
| **Product Series:** | Standard Buccaneer - USB |
| **Body Colour:** | Black |
| **Body Material:** | PVC |
| **Cable Length:** | 3m |
| **Contact Type:** | Plug Contact |
| **Coupling Type:** | Screw |
| **Current Max:** | 1A |
| **Data Cable Type:** | USB 3.0 Standard A Plug to Sealed A Plug |
| **Diameter Over Coupling Ring Mm:** | 38.1mm |
| **Flamability Rating:** | UL94V-0 |
| **Ip Rating:** | IP68, IP69K |
| **Max Operating Temperature:** | +70°C |
| **Min Operating Temperature:** | 0°C |
| **Number Of Contacts:** | 9 Contacts |
| **Rohs Compliant:** | Yes |
| **Voltage Max:** | 5V |

### // Product PDF Links

Standard Series USB connectors...

### // Product 3D CAD Model Links

PX0840/A3/3M003D CAD Model