
## PX0840/AA/3M00 Datasheet



## Product Name // Overmoulded USB 2.0 Cable PX0840 Series USB Standard A Plug to Sealed A Plug 3m Cable





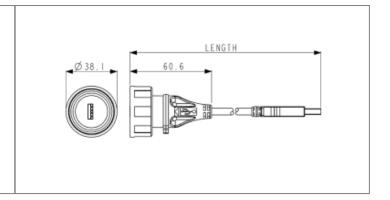

## // Product Description:

- 0 Pre-Wired Overmoulded USB 2.0 Cable
- 0 Water and dustproof to IP68 when mated with compatible
- Standard USB 2.0 Type A plug to Sealed Standard USB 2.0 Type A plua
- 3m Cable Length
- O PX0835 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PX08 Standard USB 2.0 Series Panel Mount Connectors

## // General Information:

Product Display Title:

**Product Family: Product Series:** 

**Body Colour:** 

**Body Material:** 

Cable Length: Contact Type:

Coupling Type:

**Current Max:** 

Data Cable Type:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function:

Ip Rating:

Max Operating Temperature: Min Operating Temperature: **Number Of Contacts:** 

Rohs Compliant: Voltage Max:

Pre-Wired Overmoulded USB 2.0 Cable

Circular Data Connectors

Standard Buccaneer - USB

Black

 $\mathsf{PVC}$ 3m

Plug Contact Screw

USB 2.0 Standard A Plug to Sealed A Plug

38.1mm

UL94V-0

Flex to Standard Connector Double Ended Cable

IP68, IP69K

+70°C 0°C

4 Contacts

Yes 5V

// Product PDF Links

Standard Series USB connectors..

// Product 3D CAD Model Links



PX0840/AA/3M003D CAD Model