
PX0840/B/2M00 Datasheet



Product Name // Overmoulded USB Cable PX0840 Series **USB Standard A Plug to Sealed B Plug 2M Cable**





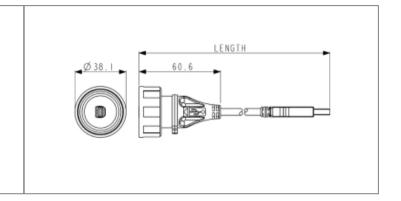

// Product Description:

- O Pre-Wired Overmoulded USB V2.0 Cable
- 0 Water and dustproof to IP68 when mated with compatible
- 0 Two versions:
- Part codes containing /A are Standard USB Type B plug to Sealed Standard USB Type A plug
- Part codes containing /B are Standard USB Type A plug to Sealed Standard USB Type B plug
- Ó Choice of cable lengths depending on part code suffix
- PX0835 Sealing Cap available separately to maintain IP rating of
- Mate with PX08 Standard USB Series Panel Mount Connectors

// General Information:

Product Display Title: **Product Family:**

Product Series:

Change Notes:

Approvals:

Body Material:

Cable Length: Contact Type:

Coupling Type:

Current Max:

Data Cable Type:

Diameter Over Coupling Ring Mm:

Flamability Rating:

Function:

Ip Rating:

Max Operating Temperature: Min Operating Temperature: Number Of Contacts:

Rohs Compliant:

Voltage Max:

Pre-Wired Overmoulded USB V2.0 Cable Circular Data Connectors

Standard Buccaneer - USB

PRODUCT-MOQ-ADJUSTMENT

CSA, UL, VDE

PVC

2m

Plug Contact

Screw

1A

USB Standard A Plug to Sealed B Plug

38.1mm

UL94V-0

Flex to Standard Connector Double Ended Cable

IP68, IP69K

+70°C

0°C

4 Contacts

30V





// Product 3D CAD Model Links



PX0840/B/2M003D CAD Model